DLF1236 V2 / DLH1236 V2

12.1" TFT LCD, LED Backlight 1000nits, XGA (1024x768)

12.1" TFT LCD panel, built-in 1000 nits brightness for sunlight readable LCD display, high transmittance color filter, high transmission polarizing plates, Low Power Consumption, suitable for kiosk, automation, POS, transportation, gas pump.

KEY FEATURES

- Brightness: 1000nits
- LED Backlight
- XGA(1024x768)
- High Shock & Vibration Resistance
- Low Power Consumption
- High Uniformity & Low EMI Noise
- Wide Temperature
- Life Expectancy

SPECIFICATIONS

Model No.	DLF1236 V2 / DLH1236 V2
Description	12.1" TFT LCD, LED Backlight ,1000nits, XGA (1024x768)
Display Area (mm)	245.76(H) x 184.32(V) mm
Brightness	1000 cd/m^2
Resolution	1024 x 768 (XGA)
Contrast Ratio	700 : 1
Pixel Pitch (mm)	0.24(H) x 0.24(V)
Viewing Angle	+80°~-80°(H), +70°~-70°(V)
Display Colors	16.2M
Response Time (Typical)	16ms
Power Consumption	9.6W / 11.6W
Dimensions (mm)	260.5x204.0x8.4mm
Weight (Net)	0.55kg / 0.6kg
LED Driving Board	LID12A07
Control Board (Optional)	☐ AD6038GA ☐ AD6038GD ☐ AD2662GDVAR ☐ AD2662GDHMVAR
☐ AD6038GA	VGA+Audio
☐ AD6038GD	VGA+DVI
☐ AD2662GDVAR	VGA+DVI (Optional S-Video/ Component / Audio)
☐ AD2662GDHMVAR	VGA (Optional DVI-D / HDMI / S-Video/ Component / Audio)
F / R Control Button	☐ 4 Key ☐ 5 Key
☐ 4 Key	Power Switch, Menu, Select (+,-),
☐ 5 Key	Power Switch, Menu, Select (+,-), Auto
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock...
Optional	☐ AOT ☐ Touch Screen

*Specifications are subject to change without notice. **All brands or product names are trademarks or registered trademarks of their respective companies.

DLF= Panel+LED Driving Board
DLH= Panel+LED Driving Board+Control Board

MECHANICAL DRAWING

Unit: mm

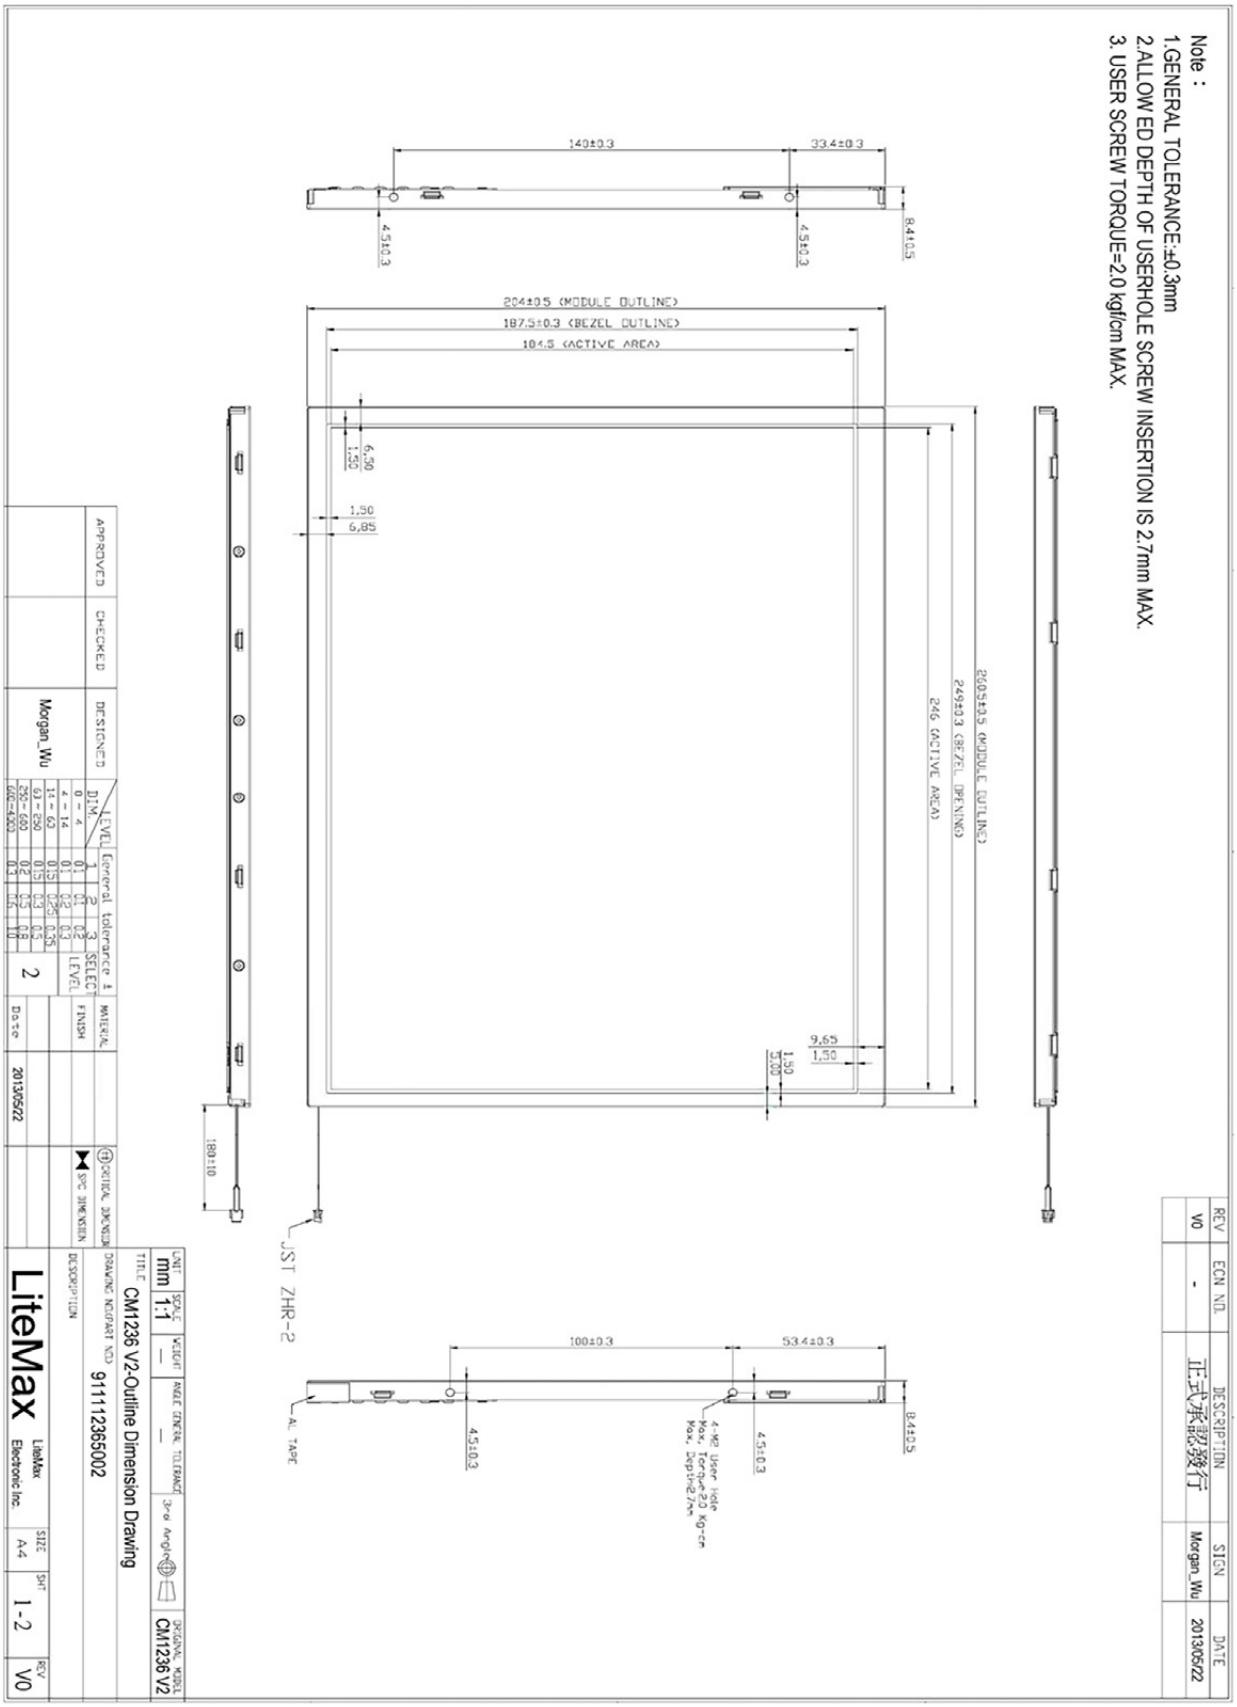

MECHANICAL DRAWING
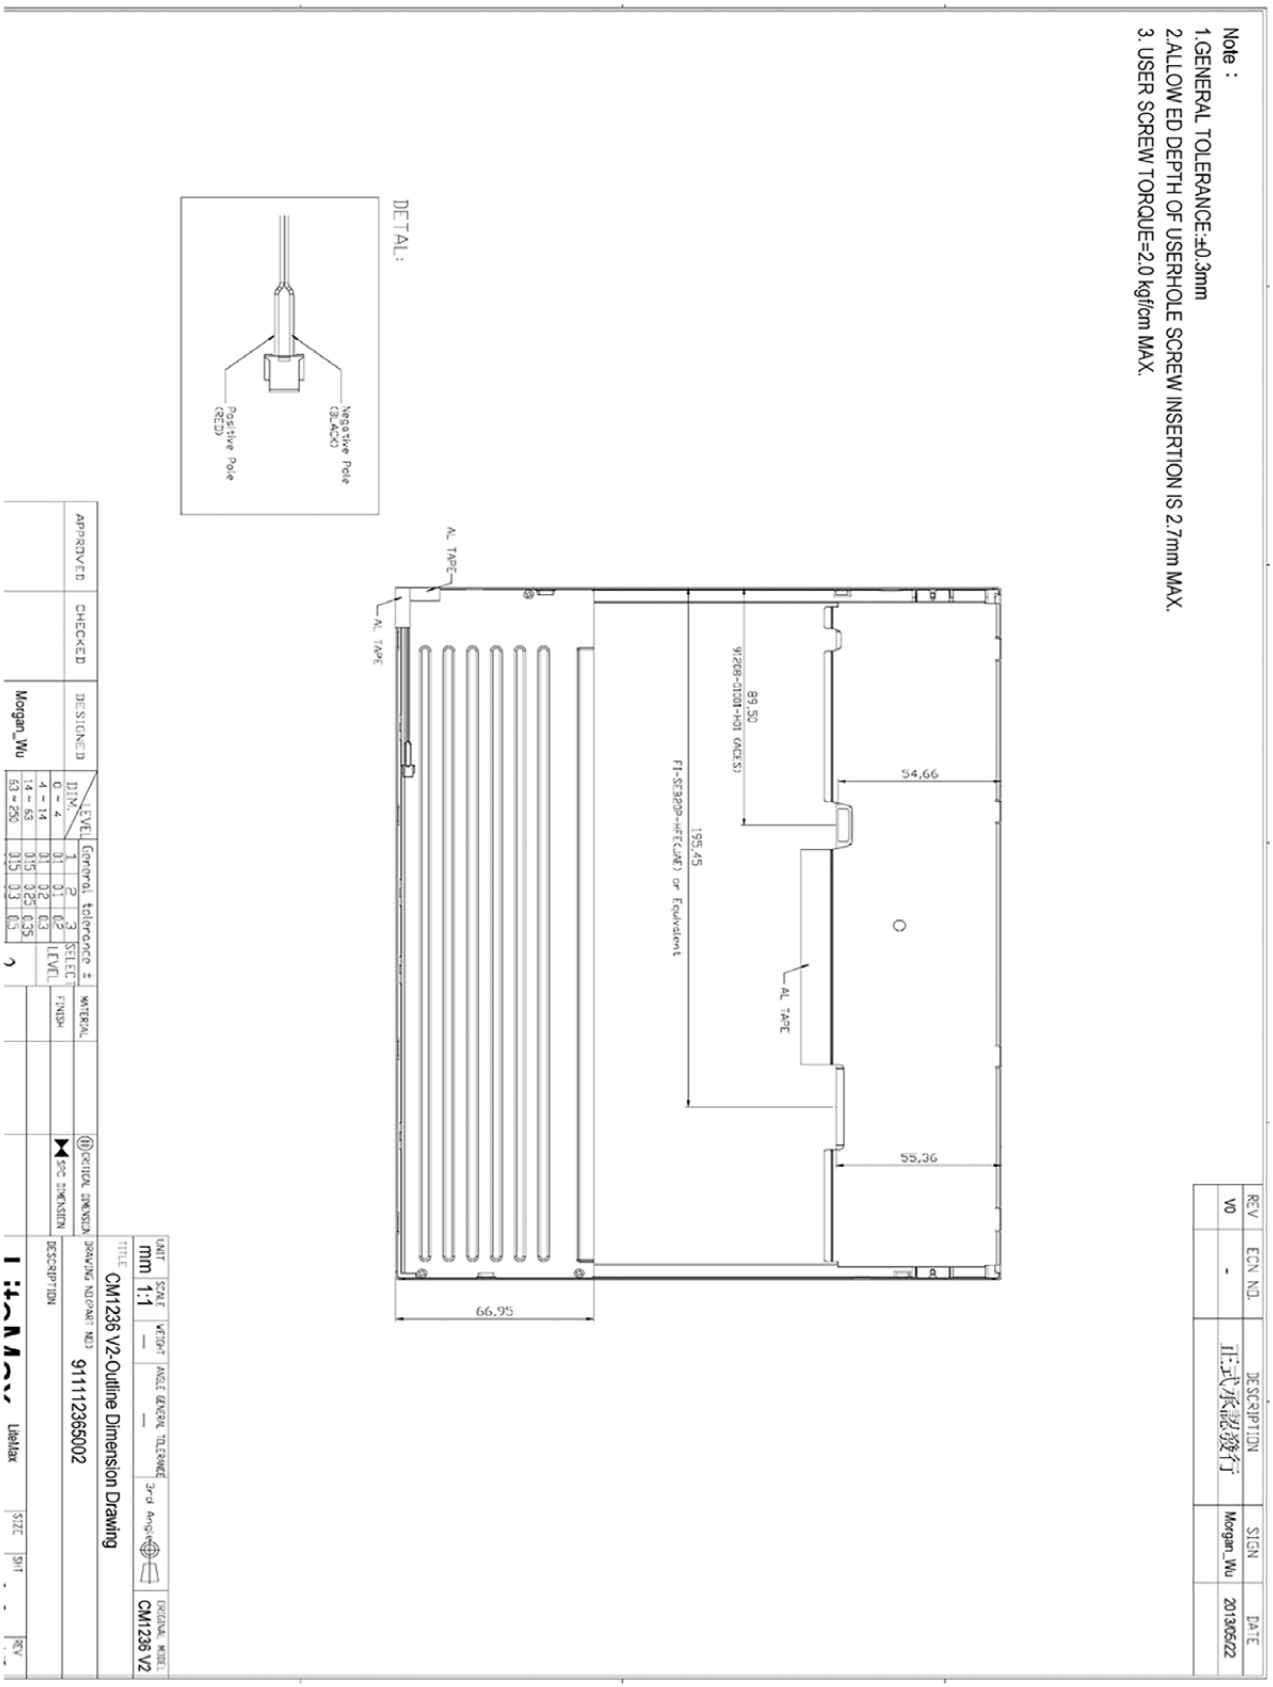
Unit: mm