

DLF / DLH2435-A V1

24" TFT LCD, Wide Viewing Angle, LED Backlight 1000nits,FHD (1920x1080)

DLF/DLH2435-A V1 TFT LCD panel, built-in 1000 nits high bright for sunlight readable LCD display, high transmittance color filter, high transmission polarizing plates, Low Power Consumption, suitable for kiosk, advertising, POS, marine, transportation, gaming, studio display, gas pump.



KEY FEATURES

- Sunlight Readable
- LED Backlight
- FHD(1920x1080) High Definition
- High Shock & Vibration Resistance
- Low Power Consumption
- Wide Viewing Angle
- High Uniformity
- Low EMI Noise
- Wide Dimming
- Life Expectancy


SPECIFICATIONS

Model No.	DLF2435-A V1 / DLH2435-A V1
Description	24" TFT LCD, LED Backlight 1000nits,FHD(1920x1080)
Display Area (mm)	531.36 x 298.89 mm
Brightness	1,000 cd/m ²
Resolution	1920 x 1080 (FHD)
Contrast Ratio	4100 : 1
Pixel Pitch (mm)	0.276(H) x 0.276(V)
Pixels Per Inch	91
Viewing Angle	+89°~-89°(H), +89°~-89°(V)
Color Saturation(NTSC)	83%
Display Colors	16.7M
Response Time (Typical)	12ms
Sync	LVDS
Operating Temperature	0°C~50°C
Storage Temperature	-20°C~60°C
Power Consumption	49.48W / 54.48W
Dimensions (mm)	555.9x323.3x14.6 mm
Weight (Net)	2.67kg
LED Driving Board	LID 24A
Control Board (Optional)	<input type="checkbox"/> AD2662GD <input type="checkbox"/> AD2662GDVAR
<input type="checkbox"/> AD2662GD	VGA+DVI
<input type="checkbox"/> AD2662GDVAR	VGA+DVI (Optional S-Video/ Component / Audio)
F / R Control Button	<input type="checkbox"/> 4 Key
<input type="checkbox"/> 4 Key	Power Switch, Menu, Select (+,-),
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock...
Optional	<input type="checkbox"/> AOT <input type="checkbox"/> Touch Screen

*Specifications are subject to change without notice. **All brands or product names are trademarks or registered trademarks of their respective companies.

DLF= Panel+LED Driving Board

DLH= Panel+LED Driving Board+Control Board

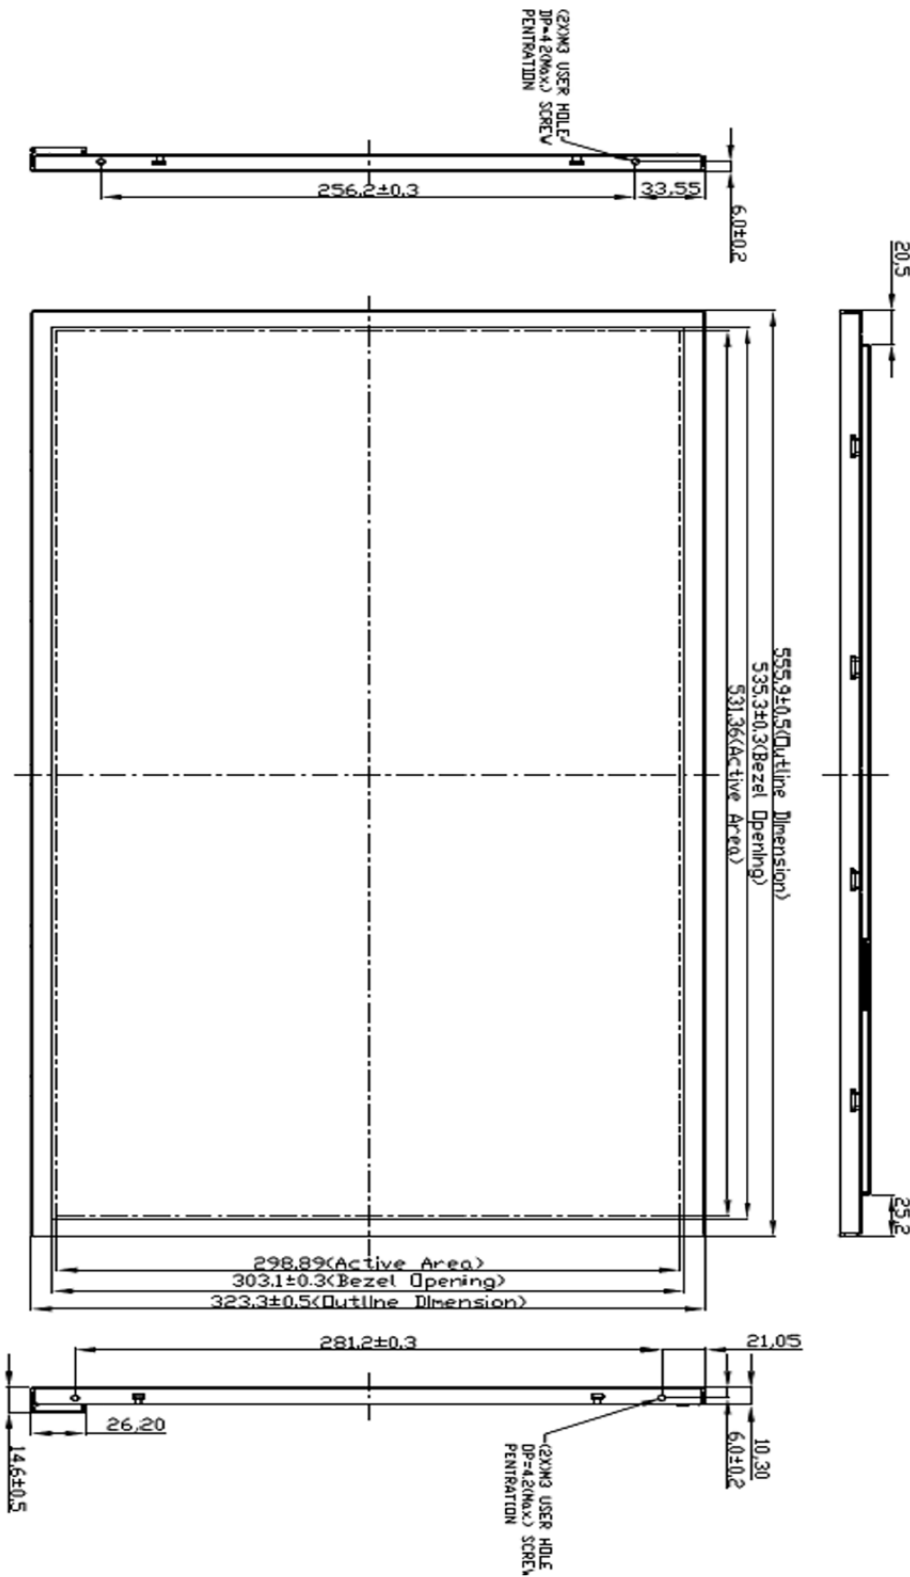

- Note :
1. THE DIMENSION EXCLUDES DEFORMATION.
 2. MODULE THICKNESS TO BE 14.6±0.5
 3. LED B/L CONNECTOR : HD2505-02 OR COMPATIBLE
 4. J/F CONNECTOR TO BE JAE FLXB30SR-HF11 OR COMPATIBLE
 5. M3 USER HOLE SCREW TORQUE 5.0 kgf-cm MAX.

