

DLF6500-ANU / DLH6500-ANU V1

65" TFT LCD, LED Backlight 2000nits, UHD(3840x2160)

The DLF/DLH6500-ANU is a 65 inch industrial grade sunlight readable LCD, with high brightness 2000 nits and high color saturation, it produce sharp images, crisp text and lifelike colors. The Durapixel LED backlight technology ensures high reliability and low power consumption, suitable for outdoor application, kiosk, factory automation, military, transportation and gaming application.



KEY FEATURES

- High Brightness 2000 nits
- Sunlight Readable
- LED Backlight
- Low Power Consumption
- Slim Bezel
- BL MTBF: 100,000 hours

SPECIFICATIONS


Model No.	DLF6500-ANU / DLH6500-ANU V1
Description	65" TFT LCD, LED Backlight 2000 nits, UHD (3840x2160)
Display Area (mm)	1428.48(H) x 803.52(V)
Brightness	2000 cd/m ²
Resolution	3840x2160
Aspect Ratio	16 : 9
Contrast Ratio	6500 : 1
Pixel Pitch (mm)	0.372(H) x 0.372(V)
Pixel Pre Inch (PPI)	67
Viewing Angle	178°(H), 178°(V)
Color Saturation (NTSC)	79%
Display Colors	1.07G
Response Time (Typical)	8ms
Panel Interface	V-by-One
AD Board Input Interface	VGA, DVI-D, HDMI, DP
AD Board Input Power	DC12V(DC24V optional)
Power Consumption	361W, (366W with AD Board)
Dimensions (mm)	1471 x 846 x 54.5
Bezel Size(U/B/L/R)	19.3/19.3/19.3/19.3 mm
Weight (Net)	29.5kg
OSD Key	5 Keys (Power Switch, Menu, +,Exit, -)
OSD Control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Operating Temperature	0 °C ~ 50 °C
Storage Temperature	-20 °C ~ 60 °C

*Specifications are subject to change without notice. **All brands or product names are trademarks or registered trademarks of their respective companies.

DLF= Panel+ LED Driving Board

DLH= Panel+ LED Driving Board + Control Board


MECHANICAL DRAWING Unit: mm

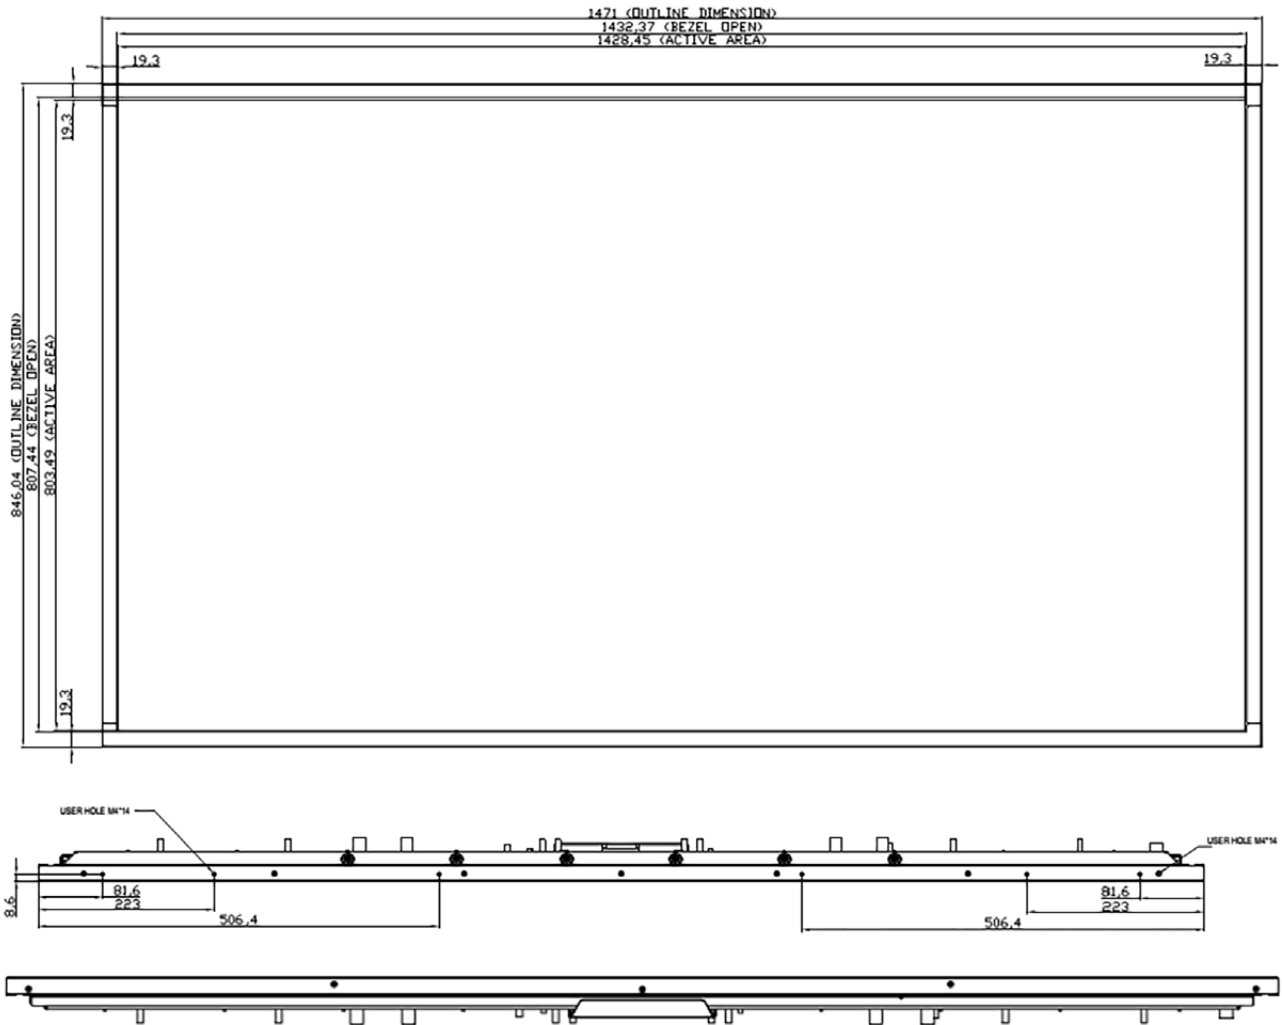

Note :

- 1.GENERAL TOLERANCE:±3.0 mm
- 2.ALLOW ED DEPTH OF USERHOLE SCREW INSERTION IS 4.0mm MAX.

MECHANICAL DRAWING Unit: mm

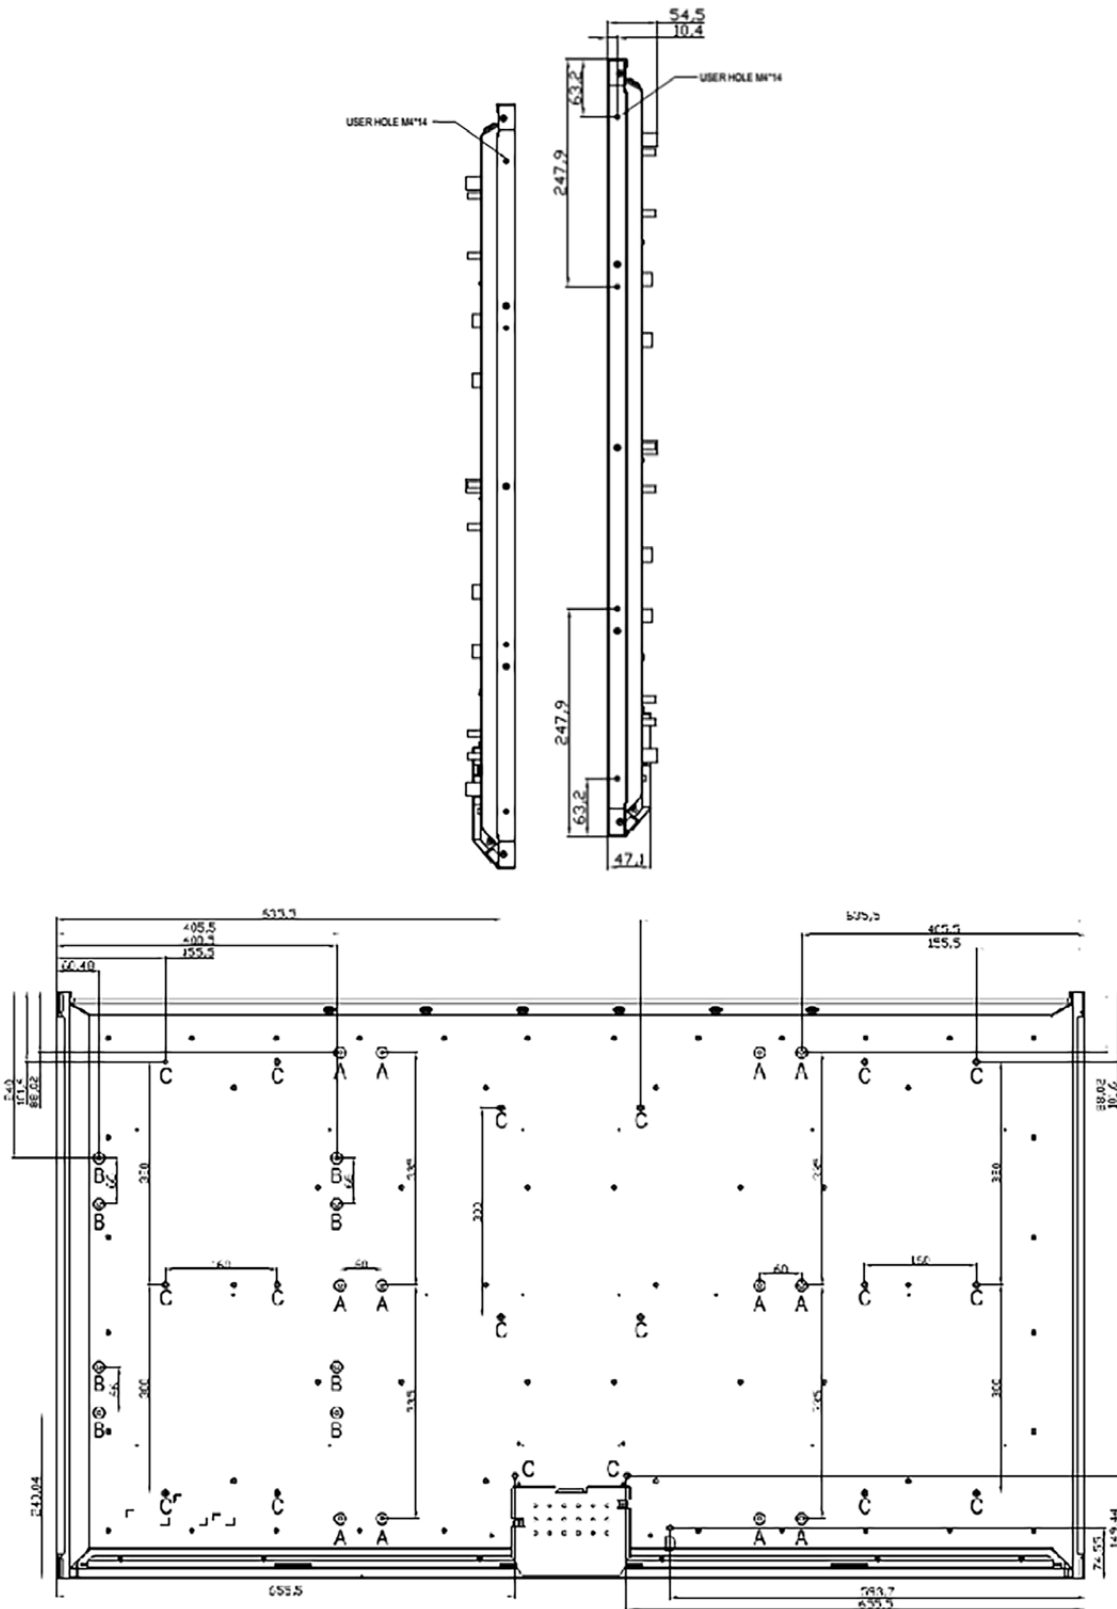

MECHANICAL DRAWING Unit: mm

ITEM	TAP	MAX.DEPTH (mm)
A	M6	17.0
B	M6	10.5
C	M4	15.5
D	M4	8.5

