

SLD1068 (2000nits)

10.4" TFT LCD, LED Backlight 2000nits, SVGA

10.4" TFT LCD panel, built-in 2000 nits high bright for sunlight readable LCD display, high transmittance color filter, high transmission polarizing plates, Low Power Consumption, suitable for kiosk, advertising, POS, marline, transportation, gaming, studio display, gas pump.



KEY FEATURES


- Sunlight Readable
- LED Backlight
- High Shock & Vibration Resistance
- Low Power Consumption
- Wide Operation Temperature
- High Uniformity
- Low EMI Noise
- Wide Dimming
- Life Expectancy

SPECIFICATIONS

Model No.	SLD1068
Description	10.4" TFT LCD, LED Backlight 2000 nits, SVGA
Display Area (mm)	210.2 (H) x 158.4(V) mm
Brightness	2000 cd/m ²
Resolution	800 x 600 (SVGA)
Contrast Ratio	600 : 1
Pixel Pitch (mm)	0.264(H) x 0.264(V)
Viewing Angle	+45°~-65°(H), +65°~-65°(V)
Display Colors	262K
Response Time (Typical)	25ms (Typical)
Sync	LVDS
Power Consumption	11W
Dimensions (mm)	249.2(W) x 206.2(H) x 45.8(D)mm
Weight (Net)	1.64Kg
LED Driving Board	LID10A
Control Board (Optional)	<input type="checkbox"/> AD6038GD
<input type="checkbox"/> AD6038GD	VGA+DVI
F / R Control Button	<input type="checkbox"/> 4 Key
<input type="checkbox"/> 4 Key	Power Switch, Menu, Select (+,-),
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock...
Optional	<input type="checkbox"/> AOT <input type="checkbox"/> Touch Screen

*Specifications are subject to change without notice. **All brands or product names are trademarks or registered trademarks of their respective companies.

SLD/SLO = Panel+ LED Driving Board + Control Board + Housing

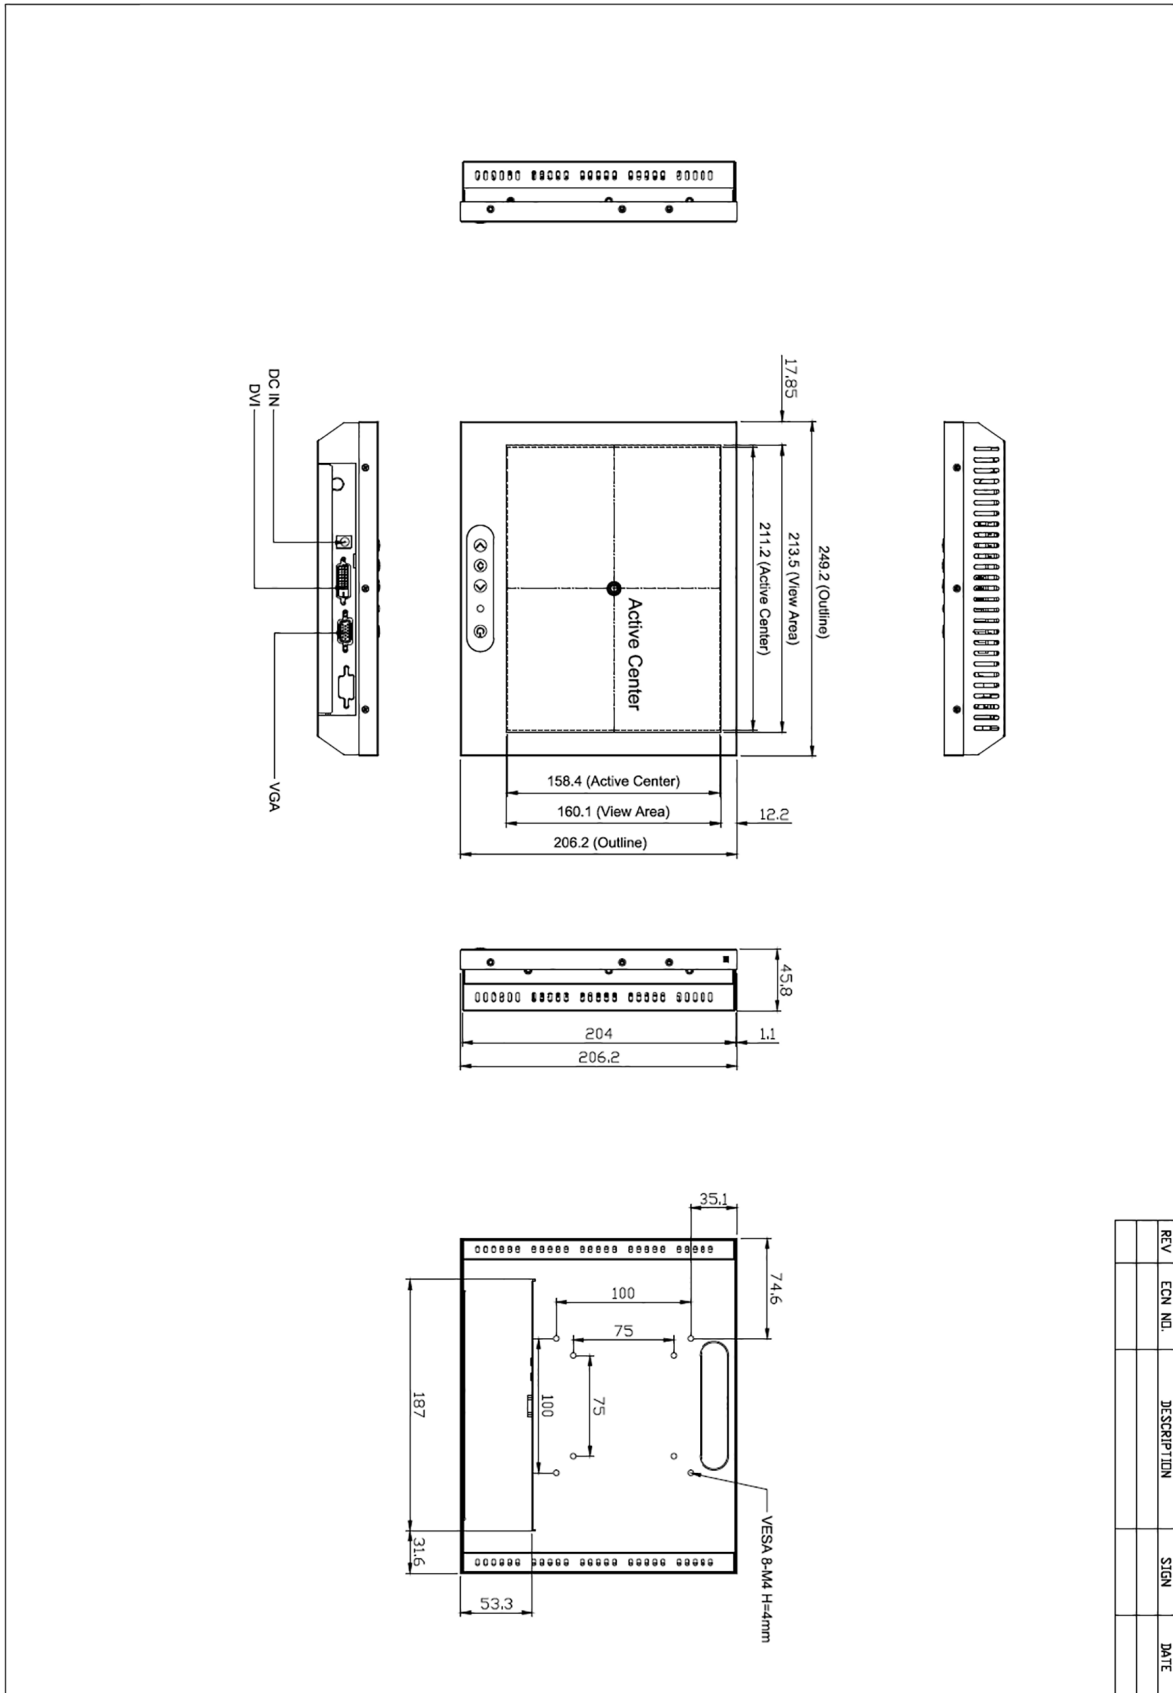

REV	ECN NO.	DESCRIPTION	SIGN	DATE