

SLO2126_V2

21.5" Wide Open Frame TFT LCD, LED Backlight 1600nits, FHD (1920x1080)

21.5" wide is a full high definition (FHD) LCD panel, built-in 1600 nits high bright for sunlight readable LCD display, high transmittance color filter, high transmission polarizing plates, Low Power Consumption, suitable for kiosk, advertising, POS, marine, transportation, gaming, studio display, gas pump.



KEY FEATURES

- Sunlight Readable
- LED Backlight
- Wide Viewing Angle
- High Shock & Vibration Resistance
- FHD High Resolution
- High Uniformity
- Low EMI Noise
- Wide Dimming
- Life Expectancy


SPECIFICATIONS

Model No.	SLO2126_V2
Description	21.5" Wide TFT LCD, LED Backlight 1600 nits, FHD
Display Area (mm)	476.64 (H) x 268.11(V)
Brightness	1600 cd/m ²
Resolution	1920 x 1080 (FHD)
Contrast Ratio	3700 : 1
Pixel Pitch (mm)	0.24825(H) x 0.24825(V)
Viewing Angle	178°(H), 178°(V)
Display Colors	16.7M
Response Time (Typical)	25ms
Sync	LVDS
Power Consumption	55W
Dimensions (mm)	545(W) x 370(H) x 60(D)mm
Weight (Net)	5.5Kg
LED Driving Board	LID21
Control Board (Optional)	<input type="checkbox"/> AD2662GD <input type="checkbox"/> AD2662GDVAR
<input type="checkbox"/> AD2662GD	VGA+DVI
<input type="checkbox"/> AD2662GDVAR	VGA+DVI (Optional S-Video/ Component / Audio / RS232)
F / R Control Button	<input type="checkbox"/> 5 Key
<input type="checkbox"/> 5 Key	Power Switch, Menu, Select (+,-), Auto
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock...
Optional	<input type="checkbox"/> AOT <input type="checkbox"/> Touch Screen

*Specifications are subject to change without notice. **All brands or product names are trademarks or registered trademarks of their respective companies.

SLD/SLO = Panel+ LED Driving Board + Control Board + Housing

MECHANICAL DRAWING Unit: mm

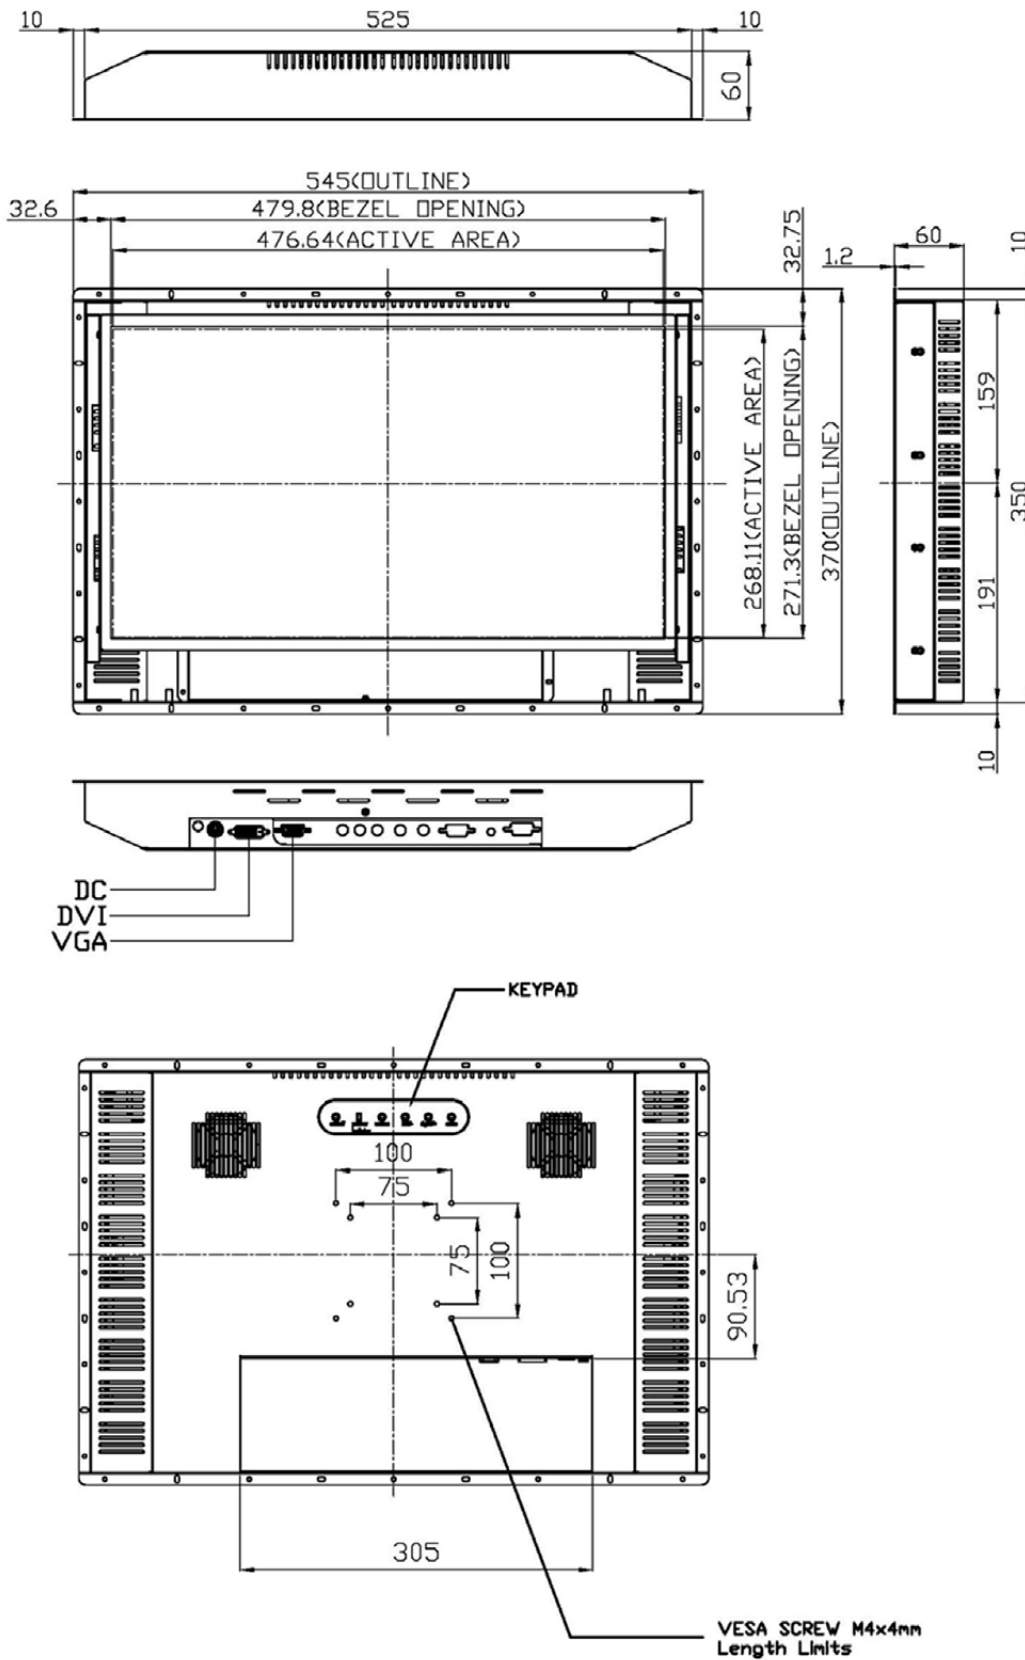

MECHANICAL DRAWING Unit: mm

