

SSD2825 V3

28" Resizing LCD, Brightness is 1000 nits, LED backlight, 1366x254 ultra wide aspect ratio 16:3

SSD2825 V3 is an innovative ultra-wide, LED backlight LCD display. It provides LCD panel with specific ratios for digital signage, public transportation, exhibition hall, department store, vending machine and industrial applications.

KEY FEATURES

- Resizing LCD
- Ultra Wide Screen (16 : 3)
- LED Backlight
- High Brightness 1000nits
- Wide Viewing Angle
- Low Power Consumption
- High Uniformity
- Wide Dimming
- Life Expectancy




SPECIFICATIONS

Model No.	SSD2825 V3
Description	28" Resizing LCD, 1000nits, LED backlight, 1366x254
Display Area (mm)	697.7 x 129.7 mm
Brightness	1000nits
Resolution	1366 x 254
Aspect Ratio	16 : 3
Contrast Ratio	3000:1
Pixel Pitch (mm)	0.51 x 0.51
Viewing Angle	178°(H), 178°(V)
Display Colors	16.7M
Response Time (Typical)	6.5 ms
Power Consumption	28W
Dimensions (mm)	745.6x183.3x51.5mm (w/o Handle)
Weight (Net)	5.8Kg
LED Driving Board	LID28A04
Control Board (Optional)	<input type="checkbox"/> AD2662GD
<input type="checkbox"/> AD2662GD	VGA+DVI
F/R Control Button	<input type="checkbox"/> 4 Key
<input type="checkbox"/> 4 Key	Power Switch, Menu, Select (+,-),
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock...
Optional	<input type="checkbox"/> AOT <input type="checkbox"/> Touch Screen




*Specifications are subject to change without notice. **All brands or product names are trademarks or registered trademarks of their respective companies.

SSD= Panel + LED Driving Board + Control Board + Housing


Note :
O.D. : Outline Dimension
B.O. : Bezel Opening
A.A. : LCD Active Area
A : 4-M4_SCREW_Max Depth=5 mm
B : 4-M6_SCREW_Max Depth=7 mm

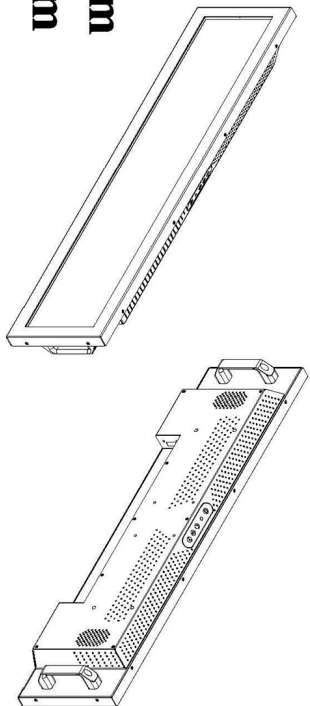


MEMBRANE 4-KEY

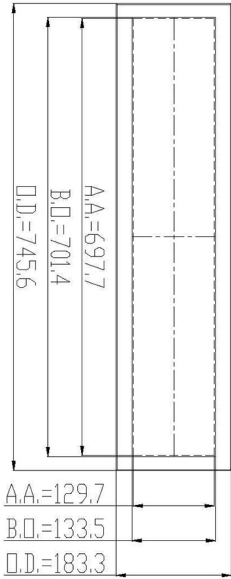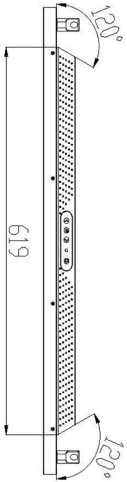


A.A.=129.7
 B.O.=133.5
 O.D.=183.3



剖视图 C-C
Scale 2:1

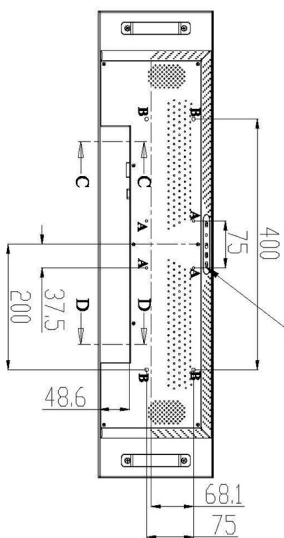

剖视图 D-D
Scale 2:1

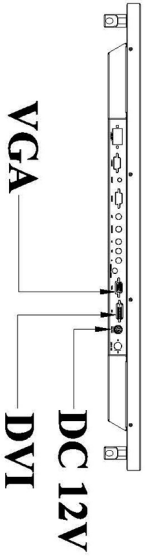

VGA

DC 12V

DVI