

SSD4350-I V1

43.5" Resizing LCD, 2000 nits LED backlight,
1920 x 268 ultra-wide aspect ratio 16:2.2

The SSD4350-I is a 43.5 inch color TFT-LCD display with special aspect ratio 16:2.2 and wide resolution 1920 x 268. It is Litemax's Spanpixel series product which designed for high brightness 2000 nits with power efficiency LED backlight. It provides LCD panel with specific aspect ratios and sunlight readable for digital signage, public transportation, exhibition hall, department store, and vending machine.

KEY FEATURES

- Resizing LCD
- Ultra-Wide Screen (16 : 2.2)
- High Brightness 2000 nits
- LED Backlight
- Low Power Consumption
- Slim Bezel
- BL MTBF: 100,000 hours




SPECIFICATIONS

Model No.	SSD4350-I V1
Description	43.5" Resizing LCD, 2000 nits LED backlight, 1920x268
Screen Size	43.5"
Display Area (mm)	1095.84(H) x 153.0(V)
Brightness	2000 cd/m ²
Resolution	1920x268
Aspect Ratio	16 : 2.2
Contrast Ratio	7000 : 1
Pixel Pitch (mm)	0.5708(H) x 0.5708(V)
Pixel Per Inch (PPI)	44
Viewing Angle	176°(H), 176°(V)
Color Saturation (NTSC)	79%
Display Colors	16.7M
Response Time (Typical)	9.5 ms
Panel Interface	LVDS
AD Board Input Interface	VGA, DVI, HDMI, DP
Input Power	AC100~240V
Power Consumption	73W
OSD Key	4 Keys (Power Switch, Menu, +, -)
OSD Control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Dimensions (mm)	1124.3x 187.4 x 64.6
Bezel Size(U/B/L/R)	14.6/14.6/12.2/12.2 mm
Weight (Net)	8.6 kg
Mounting	300 x 75
Operating Temperature	0 °C ~ 50 °C
Storage Temperature	-20 °C ~ 60 °C

*Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

SSD= Panel+ LED Driving Board + Control Board + Housing

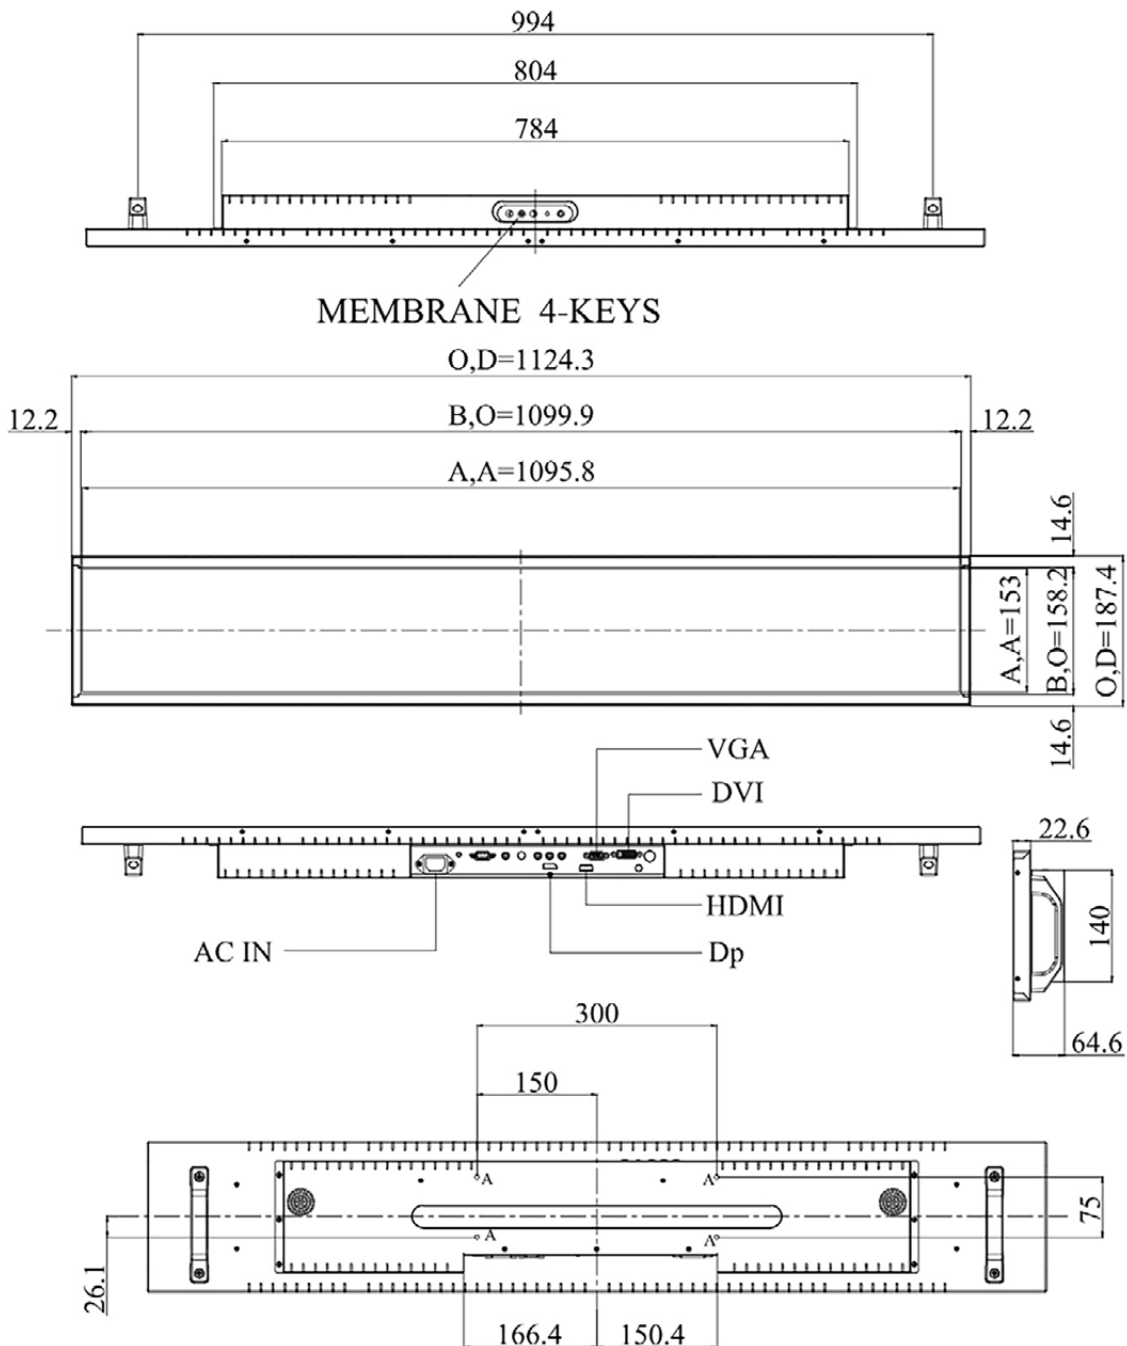

NOTE :

O.D. : OUTLINE DIMENSION

B.O. : BEZEL OPENING

A.A. : LCD ACTIVE AREA

A : 4-M6 USER HOLE MAX Depth=8mm