

SSF4355-INK / SSH4355-INK V1 MaxRGB

43.5" Resizing LCD, 1000 nits LED backlight, MaxRGB,
3840 x 536 ultra-wide aspect ratio 16:2.2



The SSF/SSH4355-INK is a 43.5 inch color TFT-LCD display with special aspect ratio 16:2.2 and wide resolution 3840 x 536 with HCS (High Color Saturation). It is Litemax's Spanpixel series product which designed for high brightness 1000 nits with power efficiency LED backlight. It provides LCD panel with specific aspect ratios and sunlight readable for digital signage, public transportation, exhibition hall, department store, and vending machine.



KEY FEATURES




- Resizing LCD
- Ultra-Wide Screen (16 : 2.2)
- High Brightness 1000 nits
- Sunlight Readable
- LED Backlight
- Slim Bezel
- High Color Saturation
- BL MTBF: 100,000 hours

SPECIFICATIONS

Model No.	SSF4355-INK / SSH4355-INK V1 MaxRGB
Description	43.5" Resizing LCD, 1000 nits LED backlight, MaxRGB, 3840x536
Display Area (mm)	1095.84(H) x 153(V)
Brightness	1000 cd/m ²
Resolution	3840x536
Aspect Ratio	16 : 2.2
Contrast Ratio	7700 : 1
Pixel Pitch (mm)	0.2854(H) x 0.2854(V)
Pixel Pre Inch (PPI)	89
Viewing Angle	178°(H), 178°(V)
Color Saturation (NTSC)	95%
Display Colors	1.07G
Response Time (Typical)	9.5ms
Panel Interface	V-by-One
AD Board Input Interface	VGA, DVI-D, HDMI, DP
AD Board Input Power	DC12V (DC24V optional)
Power Consumption	74W, (79W with AD Board)
OSD Key	5 Keys (Power Switch, Menu, +, -, Exit)
OSD Control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Dimensions (mm)	1121.7x 184.8 x 21.6
Bezel Size(U/B/L/R)	13.3/13.3/10.9/10.9 mm
Weight (Net)	4.8 kg
Operating Temperature	0°C~50°C
Storage Temperature	-20°C~60°C

*Specifications are subject to change without notice. **All brands or product names are trademarks or registered trademarks of their respective companies.

SSF= Panel+LED Driving Board • SSH= Panel+ LED Driving Board + AD Control Board

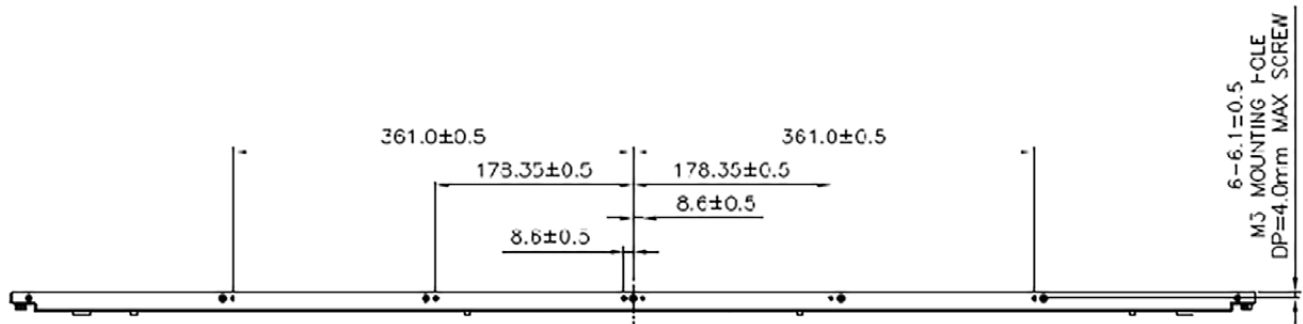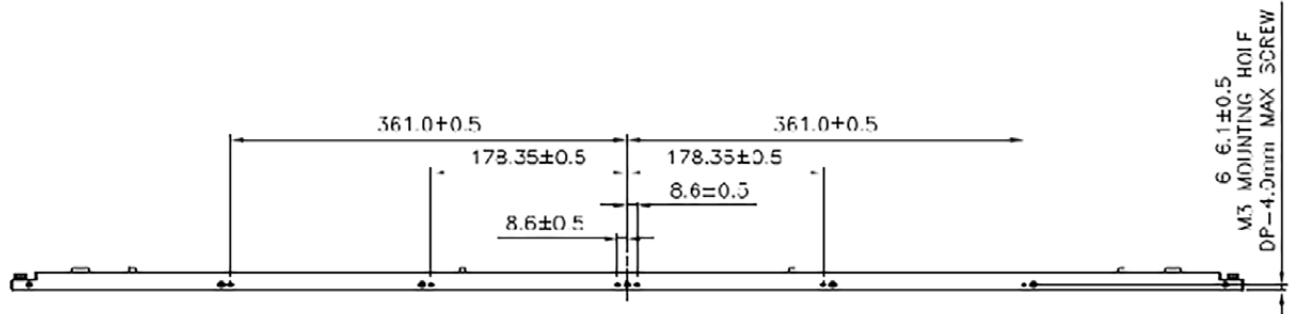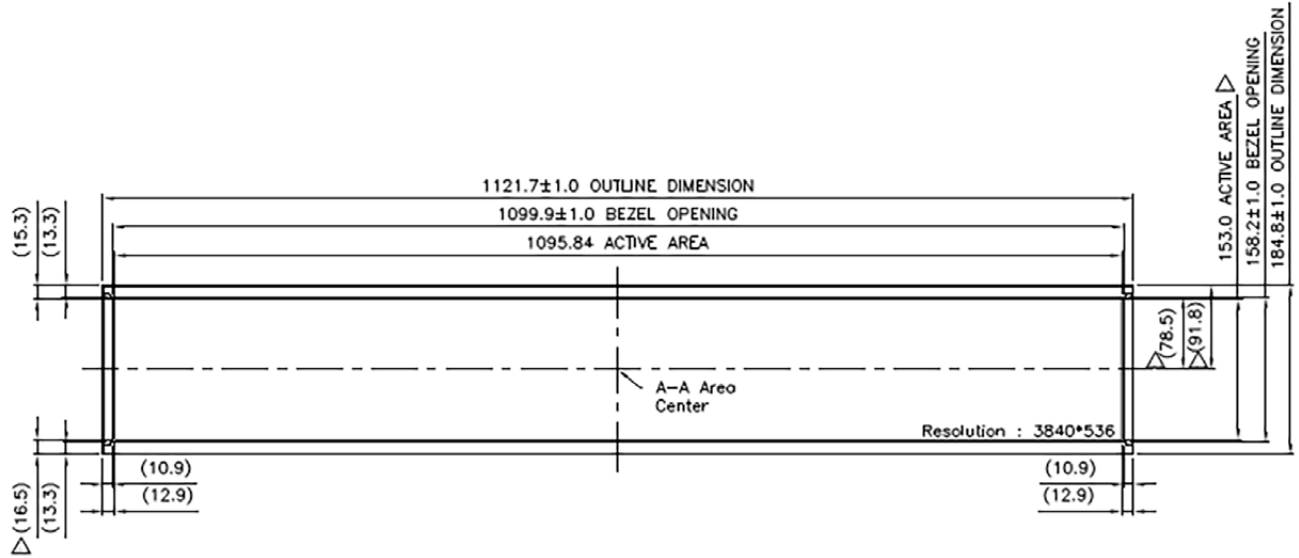

MECHANICAL DRAWING Unit: mm

