

DLD3200-GNE V1

32" TFT LCD, LED Backlight 2000nits, FHD(1920x1080)

The DLD3200-GNE is a 32 inch industrial grade sunlight readable LCD, with high brightness 2000 nits and high color saturation, it produce sharp images, crisp text and lifelike colors. The Durapixel LED backlight technology ensures high reliability and low power consumption, suitable for outdoor application, kiosk, factory automation, military, transportation and gaming application.



KEY FEATURES

- High Brightness 2000 nits
- Sunlight Readable
- LED Backlight
- Low Power Consumption
- LCD Blanking Defect Free (H-Tni 110°)
- BL MTBF: 100,000 hours



SPECIFICATIONS

Model No.	DLD3200-GNE V1
Description	32" TFT LCD, LED Backlight 2000 nits, FHD (1920x1080)
Display Area (mm)	698.4(H) x 392.8(V)
Brightness	2000 cd/m ²
Resolution	1920x1080
Aspect Ratio	16 : 9
Contrast Ratio	1400 : 1
Pixel Pitch (mm)	0.36375(H) x 0.36375(V)
Pixel Pre inch (PPI)	68
Viewing Angle	178°(H), 178°(V)
Color Saturation (NTSC)	81%
Display Colors	16.7M
Response Time (Typical)	10ms
Panel Interface	LVDS
AD Board Input Interface	VGA, DVI-D, HDMI
Input Power	AC100~240V
Power Consumption	86.8W
Dimensions (mm)	735.4 x 429.8 x 59.3
Weight (Net)	8.5kg
OSD Key	4 Keys (Power Switch, Menu, +, -)
OSD Control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Bezel Size (U/B/L/R)	16.5/16.5/16.5/16.5 mm
Mounting	100x100,200X200
Operating Temperature	0 °C ~ 50 °C
Storage Temperature	-20 °C ~ 60 °C

*Specifications are subject to change without notice. **All brands or product names are trademarks or registered trademarks of their respective companies.

DLD= Panel + LED Driving Board + AD Control Board + Housing

MECHANICAL DRAWING Unit: mm

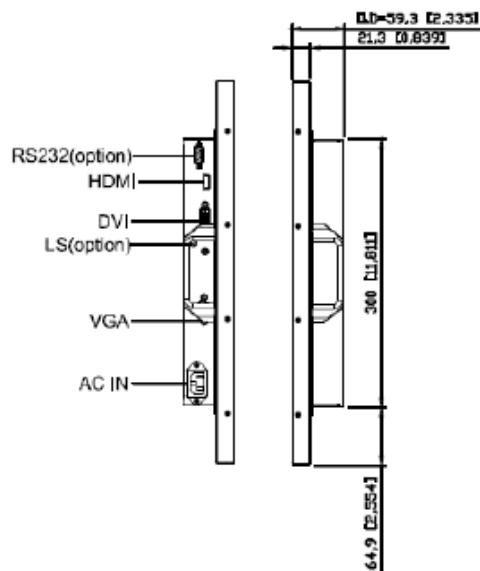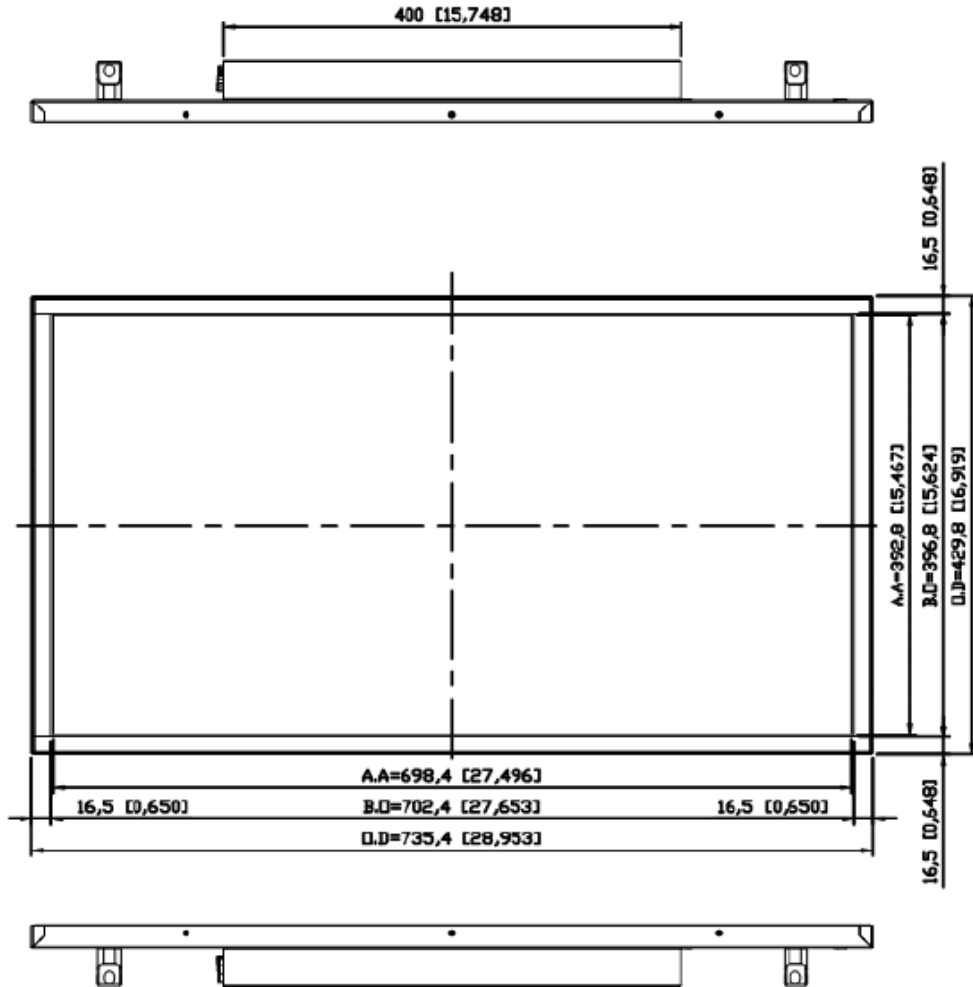

MECHANICAL DRAWING Unit: mm

