

DLF1567-A / DLH1567-A V1

15.6" TFT LCD, LED Backlight 1400nits, FHD (1920x1080)

The DLF/DLH1567-A is a 15.6 industrial grade sunlight readable LCD, with high brightness 1400 nits and high color saturation. It produces sharp images, crisp text and life-like colors. The Durapixel LED backlight technology ensures high reliability and low power consumption, suitable for outdoor application, kiosk, factory automation, military, transportation and gaming application.



KEY FEATURES

- High Brightness 1400 nits
- Sunlight Readable
- LED Backlight
- Low Power Consumption
- Wide Temperature Range
- BL MTBF: 100,000 hours




SPECIFICATIONS

Model No.	DLF1567-A / DLH1567-A V1
Description	15.6" TFT LCD, LED Backlight 1400 nits, FHD (1920x1080)
Display Area (mm)	344.2 (H) x 193.6(V)
Brightness	1400 cd/m ²
Resolution	1920x1080
Aspect Ratio	16 : 9
Contrast Ratio	800 : 1
Pixel Pitch (mm)	0.17925(H) x 0.17925(V)
Pixel Per Inch (PPI)	141
Viewing Angle	178°(H),178°(V)
Color Saturation	82%
Display Colors	16.2M
Response Time (Typical)	25ms
Panel Interface	eDP
AD Board Input Interface	VGA, DVI-D, DP
AD Board Input Power	DC12V
Power Consumption	17W, (22W with AD Board)
OSD Key	4 Keys (Power Switch, Menu, +, -)
OSD Control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Dimensions (mm)	363.8 x 215.9 x 9.3
Bezel Size(U/B/L/R)	9.7/9.7/8.4/8.4 mm
Weight (Net)	1.3kg
Operating Temperature	-10 °C ~ 60 °C
Storage Temperature	-20 °C ~ 60 °C

*Specifications are subject to change without notice. **All brands or product names are trademarks or registered trademarks of their respective companies.

DLF= Panel+LED Driving Board

DLH= Panel+LED Driving Board+Control Board

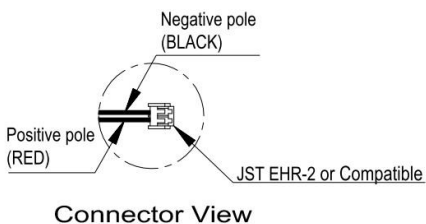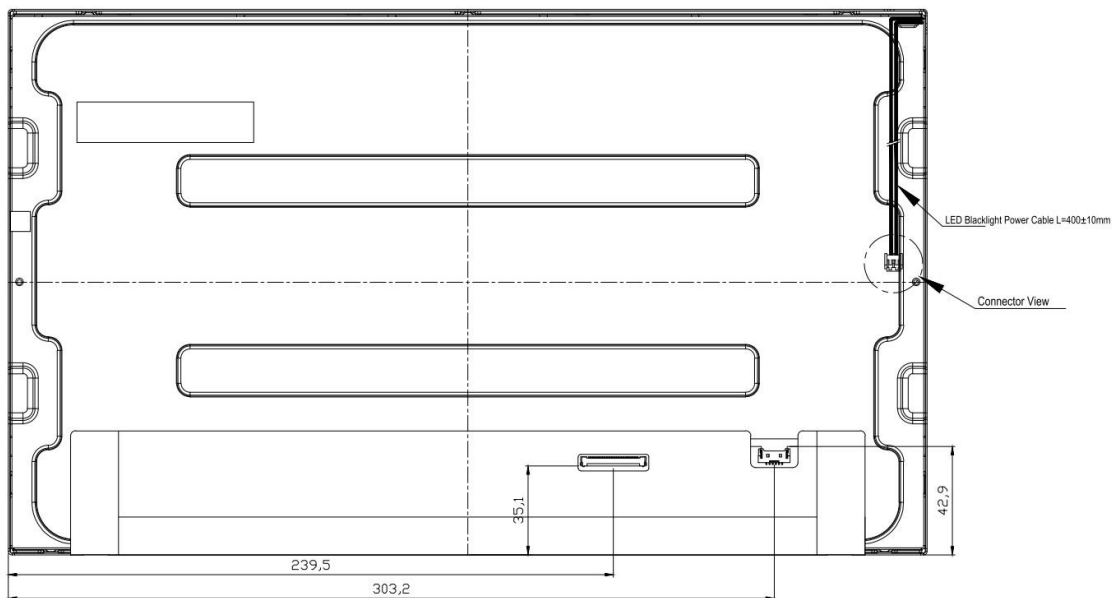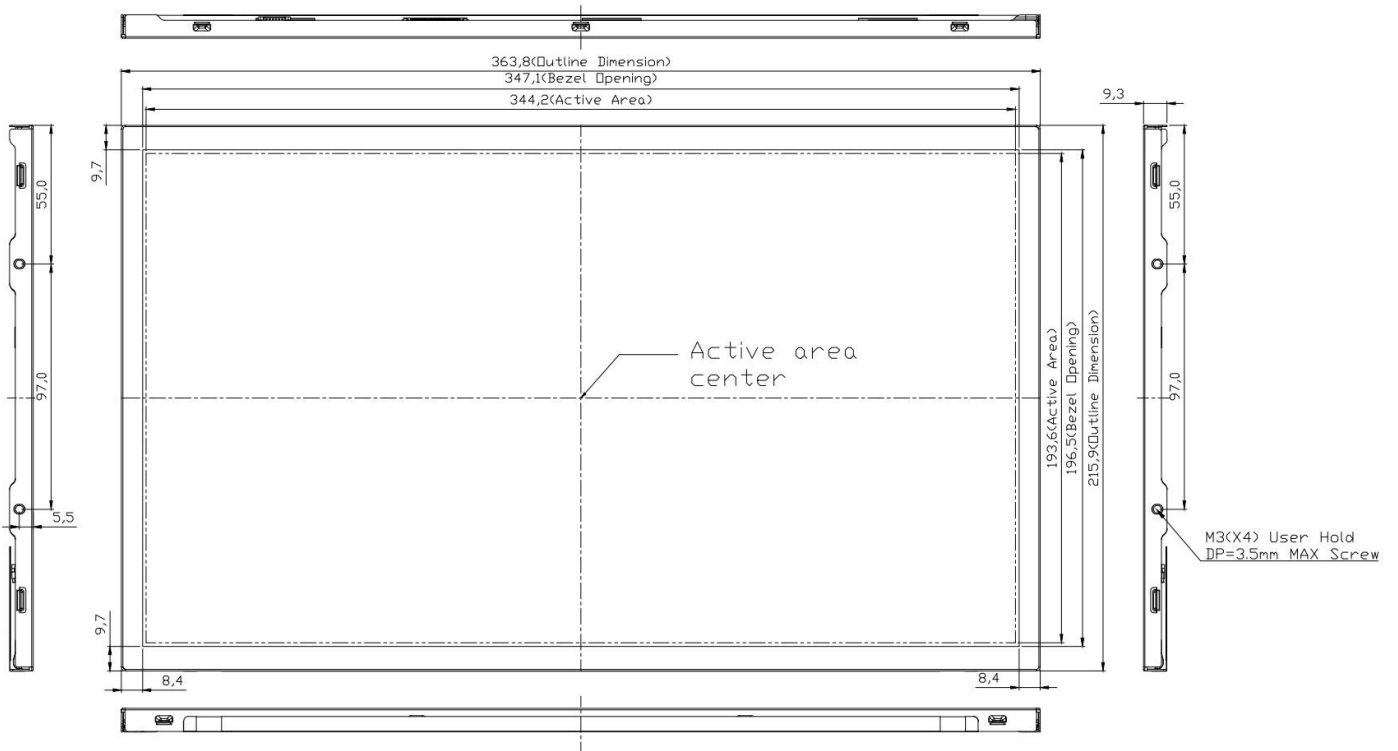

Note :

1. THE DIMENSION EXCLUDES DEFORMATION.
2. MODULE THICKNESS TO BE MAX.9.3mm
3. I/F CONNECTOR TO BE IPEX 20453-040E-12 OR COMPATIBLE
4. M3 USER HOLE SCREW TORQUE 5.0 kgf·cm MAX.