

# DLF1505-I / DLH1505-I V1

15" TFT LCD, LED Backlight 1000nits, XGA (1024x768)

The DLF/DLH1505-I is a 15-inch industrial grade sunlight readable LCD, with high brightness 1000 nits and high color saturation, produces sharp images, crisp text and life-like colors. The Durapixel LED backlight technology ensures high reliability and low power consumption, suitable for outdoor application, kiosk, factory automation, military, transportation and gaming application.



## KEY FEATURES

- High Brightness 1000 nits
- Sunlight Readable
- LED Backlight
- Low Power Consumption
- Wide Operation Temperature
- BL MTBF: 100,000 hours



## SPECIFICATIONS

Model No.	DLF1505-I / DLH1505-I V1
Description	15" TFT LCD, LED Backlight 1000 nits, XGA (1024x768)
Display Area (mm)	304.1(H) x 228.1(V)
Brightness	1000 cd/m <sup>2</sup>
Resolution	1024x768
Aspect Ratio	4 : 3
Contrast Ratio	2000 : 1
Pixel Pitch (mm)	0.297(H) x 0.297(V)
Pixel Per Inch (PPI)	85
Viewing Angle	176°(H),176°(V)
Color Saturation	81%
Display Colors	16.2M
Response Time (Typical)	23ms
Panel Interface	LVDS
AD Board Input Interface	VGA, DVI-D, HDMI
AD Board Input Power	DC12V
Power Consumption	12.6W (17.6W with AD Board)
OSD Key	4 Keys (Power Switch, Menu, +, -)
OSD Control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Dimensions (mm)	326.5 x 253.5 x 9.1
Bezel Size(U/B/L/R)	11.1/11.1/9.55/9.55 mm
Weight (Net)	0.96kg
Operating Temperature	-20 °C ~ 70 °C
Storage Temperature	-30 °C ~ 70 °C

\*Specifications are subject to change without notice. \*\*All brands or product names are trademarks or registered trademarks of their respective companies.

DLF= Panel+LED Driving Board

DLH= Panel+LED Driving Board+Control Board

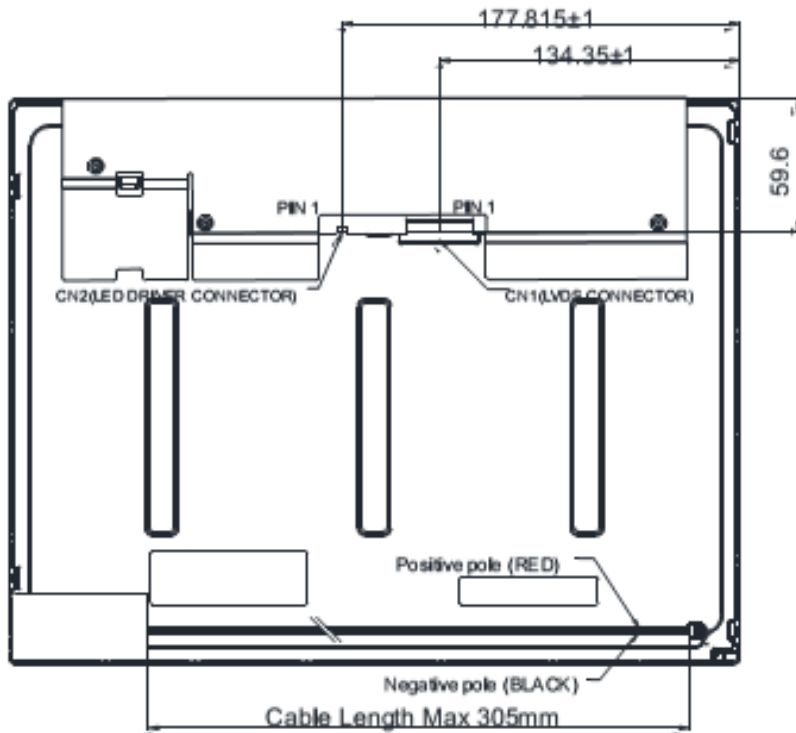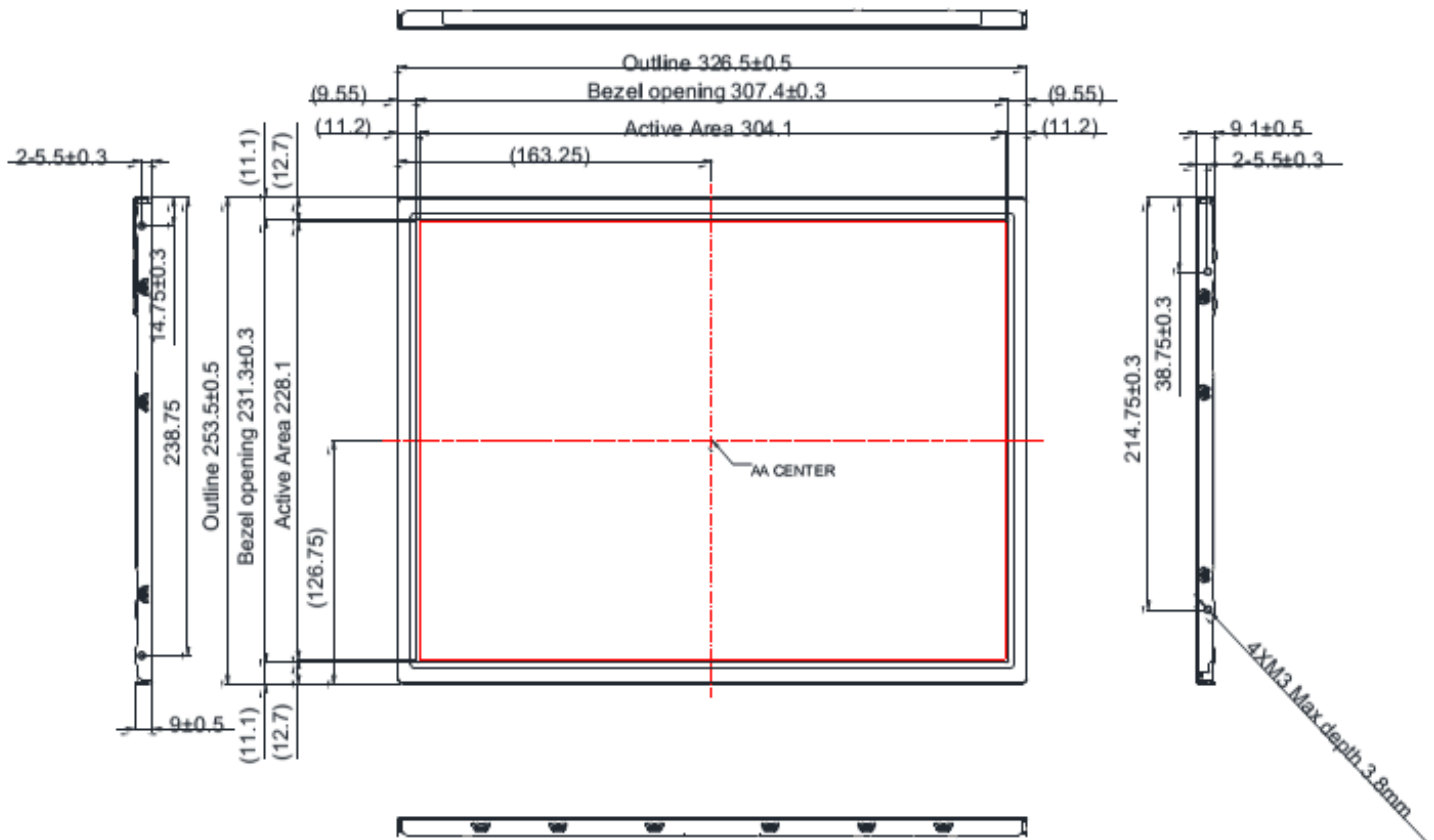

Note :  
 1. Tolerance is  $\pm 0.5$ mm unless noted.  
 2. (" ) marks the reference dimension.