


SSF2805-Y / SSH2805-Y V1

28" LCD, 1000 nits LED backlight, 1920 x 360 ultra-wide aspect ratio 16:3

The SSF/SSH2805-Y is a 28-inch color TFT-LCD display with a special aspect ratio of 16:3 and a wide resolution of 1920 x 360. It is a part of Litemax's Spanpixel series and has a high brightness of 1000 nits with a power efficient LED backlight system. It provides a LCD panel with specific aspect ratios and sunlight readability for digital signage, public transportation, exhibition hall, department store, vending machine, and more applications.

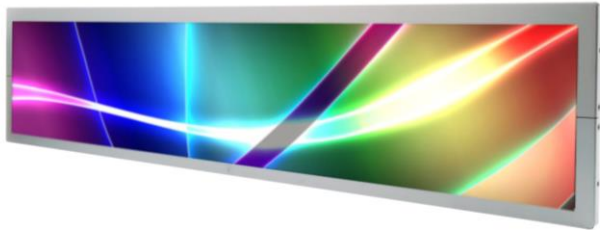

KEY FEATURES

- Ultra-Wide Screen (16 : 3)
- High Brightness 1000 nits
- Sunlight Readable
- LED Backlight
- Low Power Consumption

SPECIFICATIONS


Model No.	SSF2805-Y / SSH2805-Y V1
Description	28" LCD, 1000 nits LED backlight, 1920x360
Display Area (mm)	699.8(H) x 131.2(V)
Brightness	1000 cd/m ²
Resolution	1920x360
Aspect Ratio	16 : 3
Contrast Ratio	1000 : 1
Pixel Pitch (mm)	0.3645 (H) x 0.3645(V)
Pixel Per Inch (PPI)	70
Viewing Angle	178°(H), 178°(V)
Color Saturation (NTSC)	88%
Display Colors	16.7M
Response Time (Typical)	8ms
Panel Interface	LVDS
AD Board Input Interface	VGA, DVI-D, HDMI
Input Power	DC12V
Power Consumption	22W/ (25W with AD Board)
Dimensions (mm)	732x 165 x 16.8
Bezel Size(U/B/L/R)	14.5/14.5/14/14 mm
Weight (Net)	2.4kg
OSD Key	4 Keys (Power Switch, Menu, +, -)
OSD Control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Operating Temperature	0 °C ~ 50 °C
Storage Temperature	-20 °C ~ 60 °C

*Specifications are subject to change without notice. **All brands or product names are trademarks or registered trademarks of their respective companies.

SSF= Panel + LED Driving Board

SSH= Panel + LED Driving Board + AD Control Board

MECHANICAL DRAWING Unit: mm

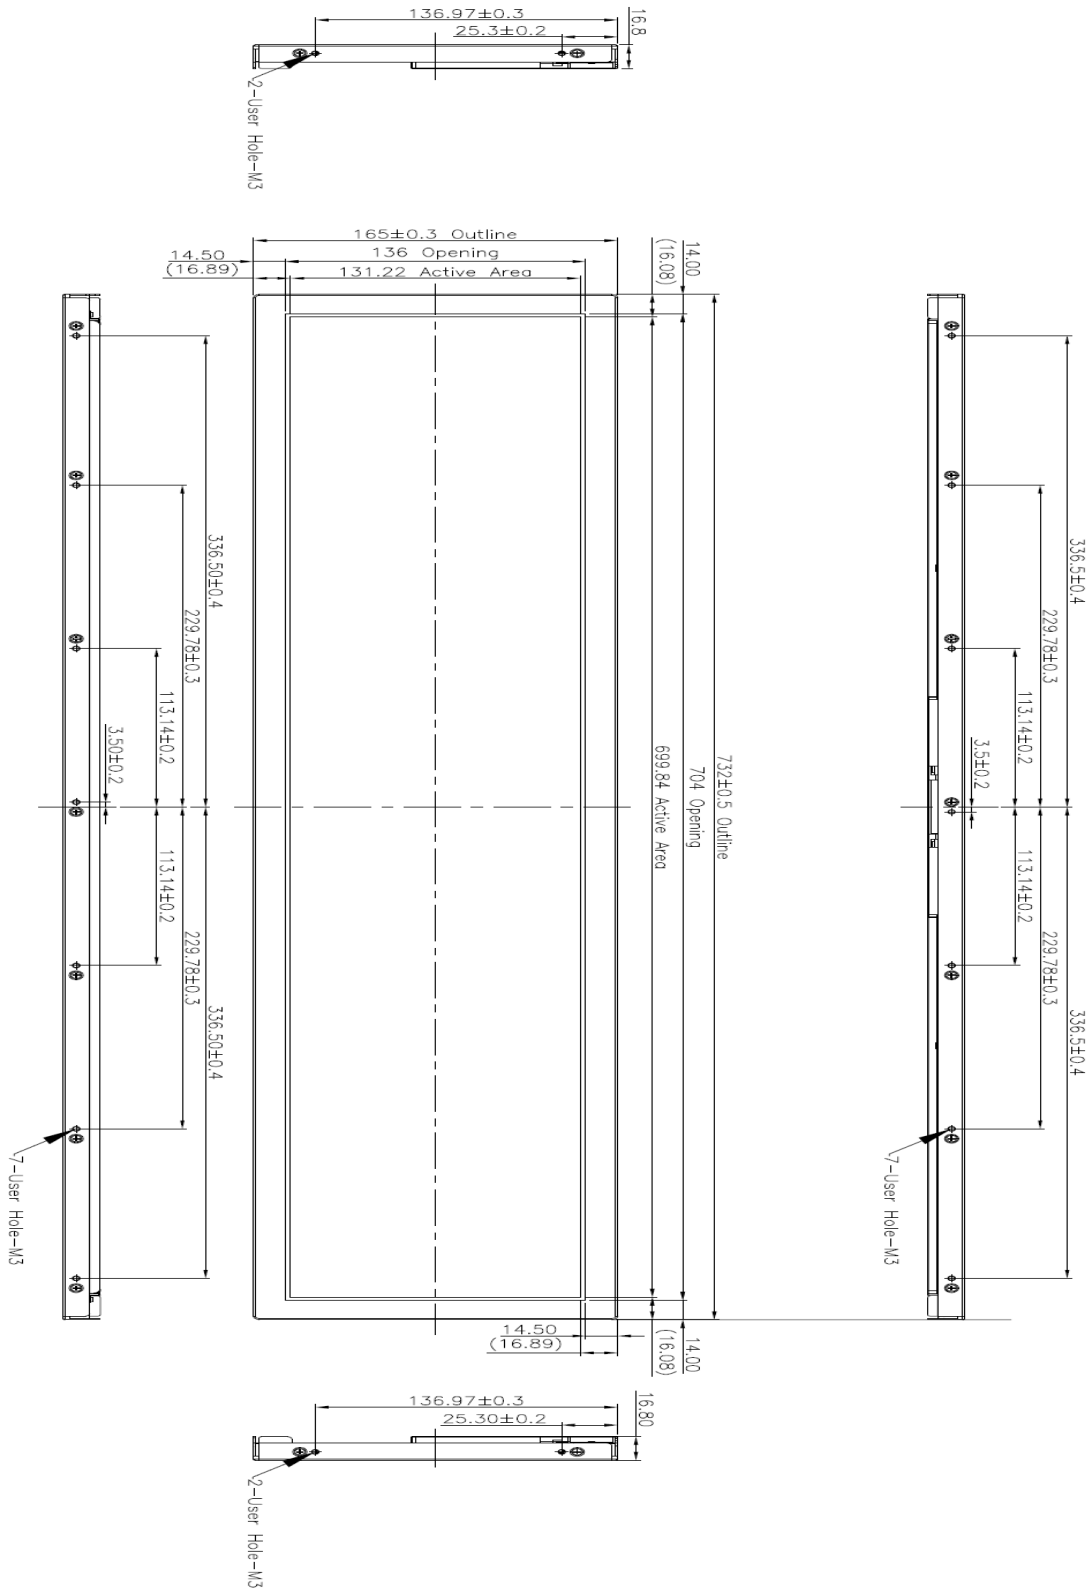

MECHANICAL DRAWING Unit: mm

