

Help Guide

HOW TO ATTATCH PANEL-BRITE PCAP TOUCH MONITORS FOR WATERPROOF SEAL




01.


Kiosk Design

Customer should build inside of kiosk with mounting studs to attach Panel-Brite displays' brackets. See below.

(diagram portrays display cutout in a portrait configuration)

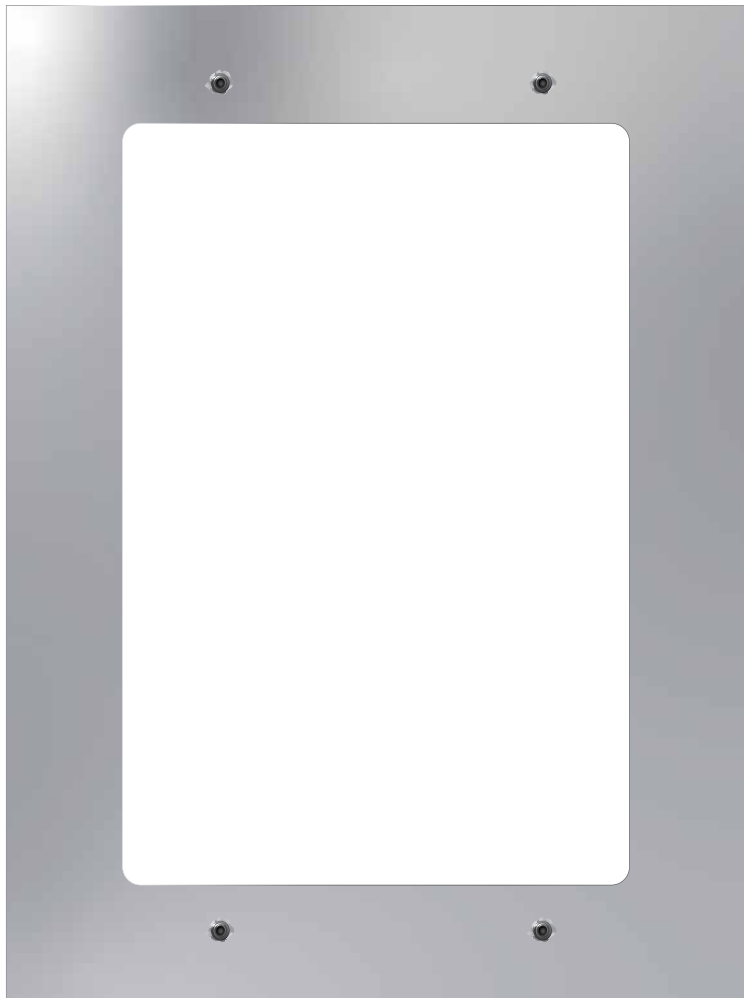

INSIDE VIEW

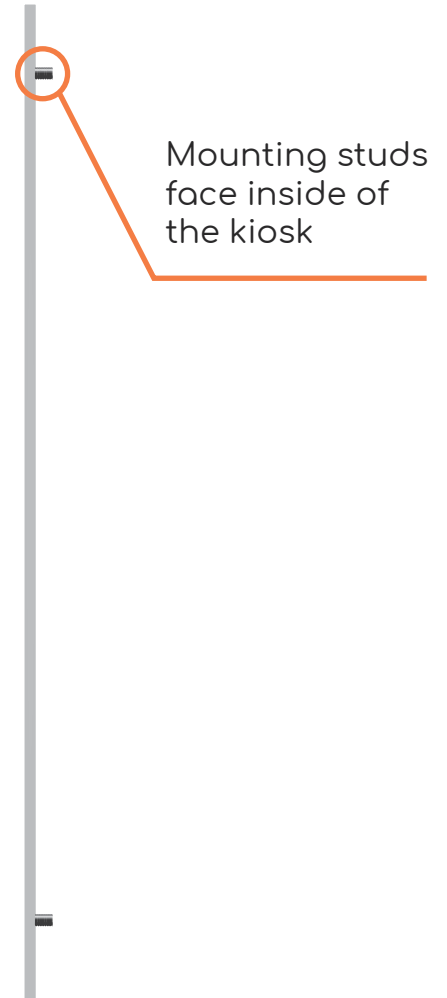

Mounting studs
face inside of
the kiosk

SIDE VIEW



02.

Rubber Gasket

Customer supplies the rubber gasket to create waterproof seal and adheres it to the inside of the kiosk between the display's cut out and mounting studs.

(diagram portrays display cut out in a portrait configuration)

Black rubber gasket is applied to the inside of the kiosk between the mounting screws and display opening.



INSIDE VIEW



03.

Display Attachment

Customer will attach display to kiosk by sliding the mounting screw through the panel brackets. See below.

(diagram portrays display cutout in a portrait configuration)



Mounting studs go through panel brackets for secure installation.



04.

Waterproof Seal

Customer secures display by tightening nuts on to mounting studs. The pressure and tightness of the nuts creates a waterproof seal with the rubber gasket on the front side of the monitor.

(diagram portrays display cutout in a portrait configuration)



Nuts are tightened to create waterproof seal.

INSIDE VIEW

