

# DLF/DLH1568-I V1

15" TFT LCD, LED Backlight 1600nits, 1024x768

The DLF/DLH1568-I is a 15 inch industrial grade sunlight readable LCD with a high brightness of 1600 nits. It produces sharp images, crisp text, and lifelike colors. The Durapixel LED backlight technology ensures high reliability and low power consumption, suitable for outdoor, kiosk, factory automation, military, transportation, gaming applications, and so much more.



## KEY FEATURES

- High Brightness 1600 nits
- Sunlight Readable
- LED Backlight
- Low Power Consumption
- Wide Operation Temperature
- BL MTBF: 100,000 hours




## SPECIFICATIONS


Model No.	DLF/DLH1568-I
Description	15" TFT LCD, LED Backlight 1600 nits,
Display Area (mm)	304.1(H) x 228.1(V)
Brightness	1600 cd/m <sup>2</sup>
Resolution	1024x768
Aspect Ratio	4 : 3
Contrast Ratio	6500 : 1
Pixel Pitch (mm)	0.297(H) x 0.297(V)
Pixel Per Inch (PPI)	85
Viewing Angle	176°(H),176°(V)
Color Saturation (NTSC)	80%
Display Colors	16.7M
Response Time (Typical)	23ms
Panel Interface	LVDS
AD Board Input Interface	DVI-I,HDMI,DP
AD Board Input Power	DC12V
Power Consumption	20W, 23W (with AD board)
OSD Key	4 Keys (Power Switch, Menu, +, -)
OSD Control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Dimensions (mm)	326.5(H) x 253.5(V) x 21 (T)
Bezel Size(U/B/L/R)	11.1/11.1/9.55/9.55 mm
Weight (Net)	1kg
Operating Temperature	-30 °C ~ 80 °C
Storage Temperature	-40 °C ~ 80 °C

\*Specifications are subject to change without notice. \*\*All brands or product names are trademarks or registered trademarks of their respective companies.

DLF= Panel + LED Driving Board

DLH= Panel + LED Driving Board + AD Control Board

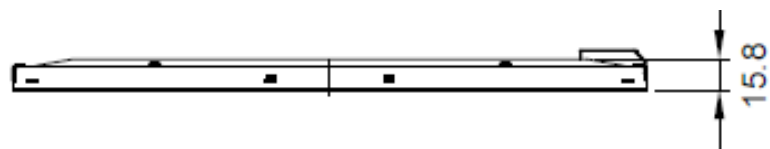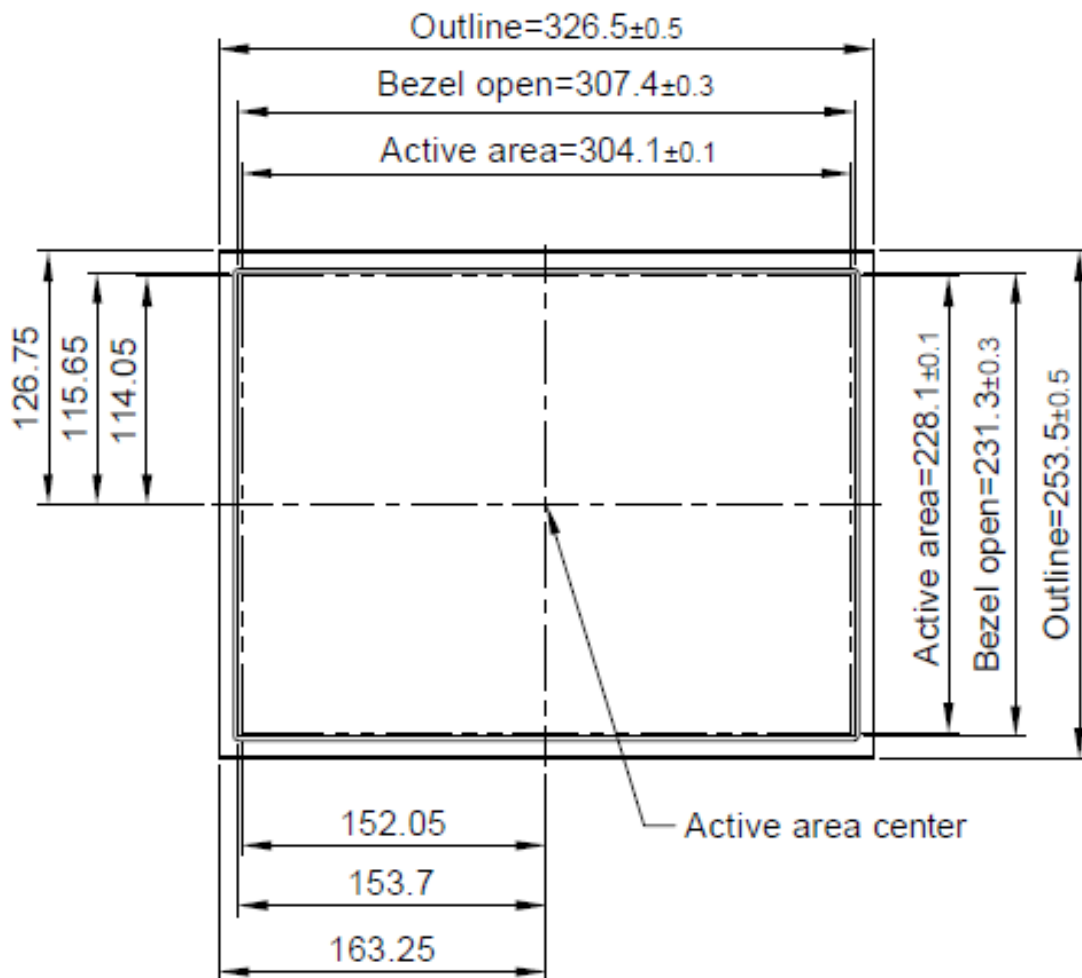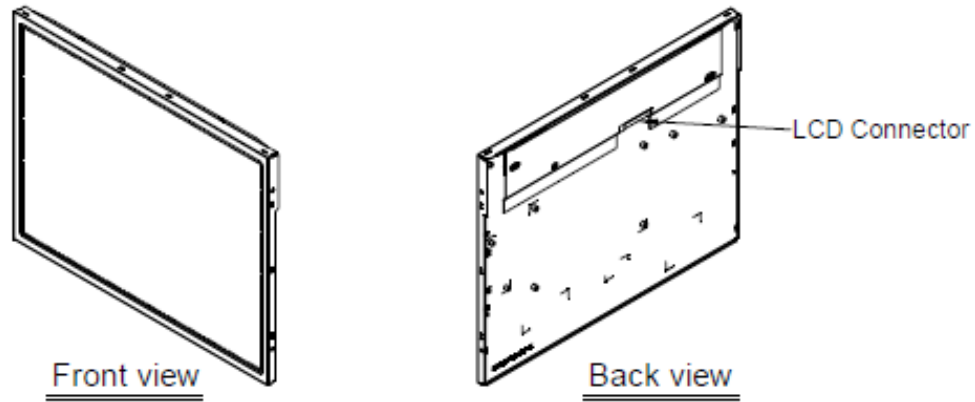

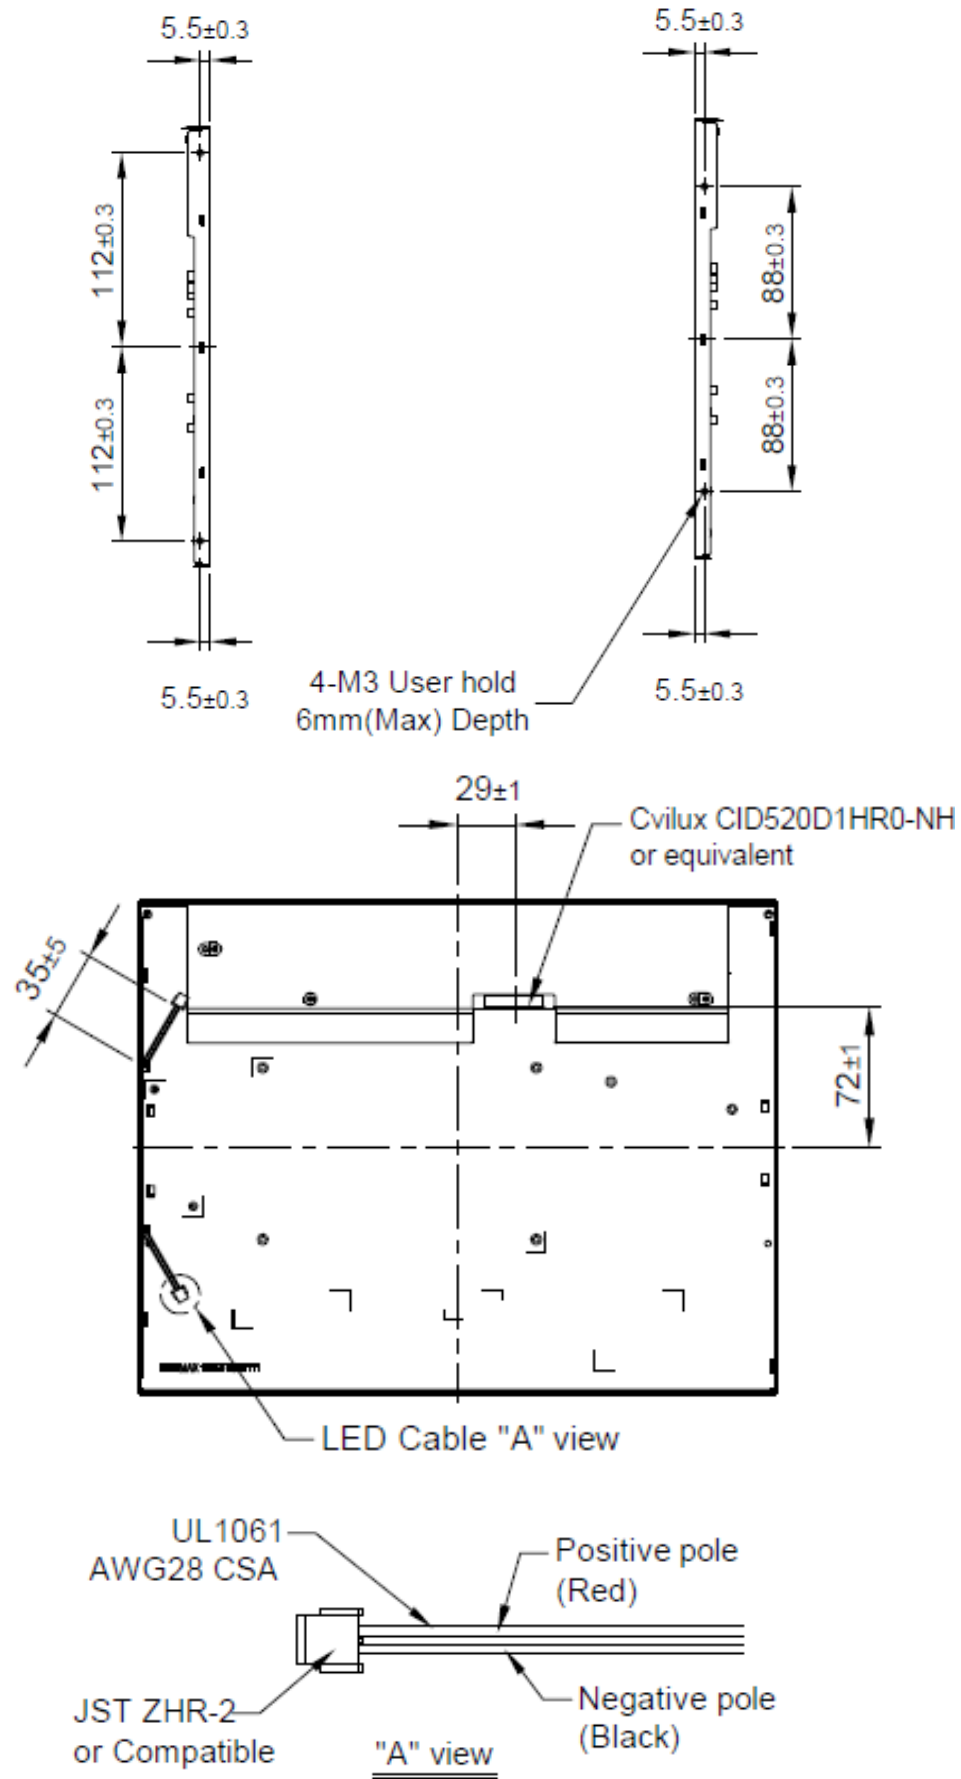

Note : General Tolerance:±0.5mm