

DLF4305-ANU / DLH4305-ANU V1

43" TFT LCD, LED Backlight 1000nits, UHD(3840x2160)

The DLF/DLH4305-ANU is a 43 inch industrial grade sunlight readable LCD with a high brightness of 1000 nits. It produces sharp images, crisp text, and lifelike colors. The Durapixel LED backlight technology ensures high reliability and low power consumption, suitable for outdoor, kiosk, factory automation, military, transportation, gaming applications, and so much more.



KEY FEATURES

- High Brightness 1000 nits
- Sunlight Readable
- LED Backlight
- Low Power Consumption
- BL MTBF: 100,000 hours


SPECIFICATIONS




Model No.	DLF4305-ANU / DLH4305-ANU V1
Description	43" TFT LCD, LED Backlight 1000 nits, UHD (3840x2160)
Display Area (mm)	941.18(H) x 529.42(V)
Brightness	1000 cd/m ²
Resolution	3840x2160
Aspect Ratio	16 : 9
Contrast Ratio	4000 : 1
Pixel Pitch (mm)	0.49(H) x 0.49(V)
Pixel Per Inch (PPI)	102
Viewing Angle	178°(H),178°(V)
Color Saturation (NTSC)	86%
Display Colors	1.07G
Response Time (Typical)	8ms
Panel Interface	V-by-One
AD Board Input Interface	DVI-D, HDMI, DP
AD Board Input Power	AC100~240V
Power Consumption	109.4W (116.5W with AD Board)
OSD Key	5 Keys (Power Switch, Menu, +, Exit, -)
OSD Control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Dimensions (mm)	970 x 564.3 x 26.92
Bezel Size(U/B/L/R)	15.44/15.44/12.41/12.41 mm
Weight (Net)	9.9kg
Operating Temperature	0 °C ~ 50 °C
Storage Temperature	-20 °C ~ 60 °C

*Specifications are subject to change without notice. **All brands or product names are trademarks or registered trademarks of their respective companies.

DLF= Panel + LED Driving Board

DLH= Panel + LED Driving Board + AD Control Board

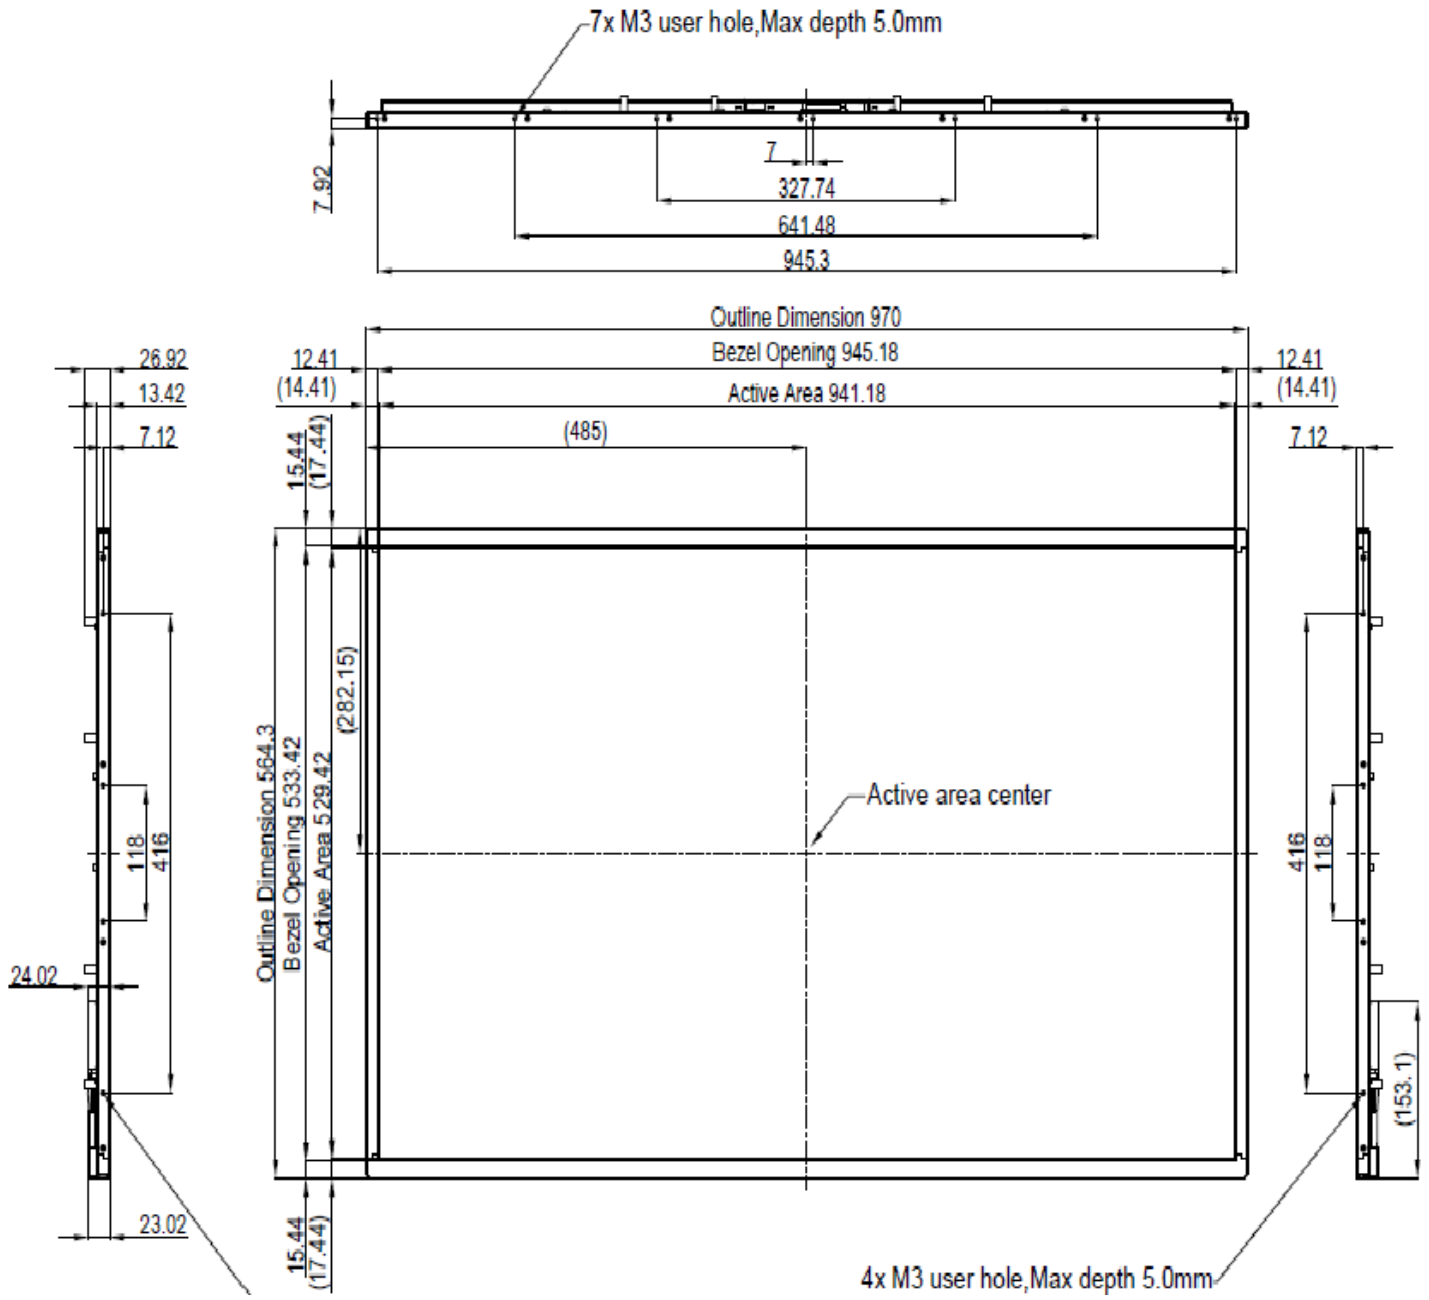

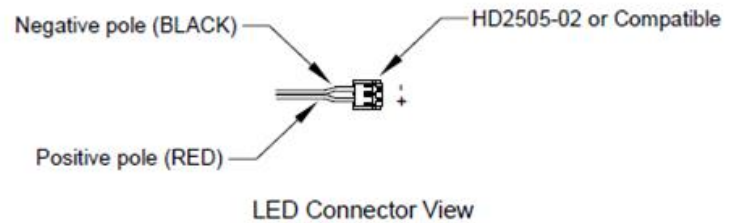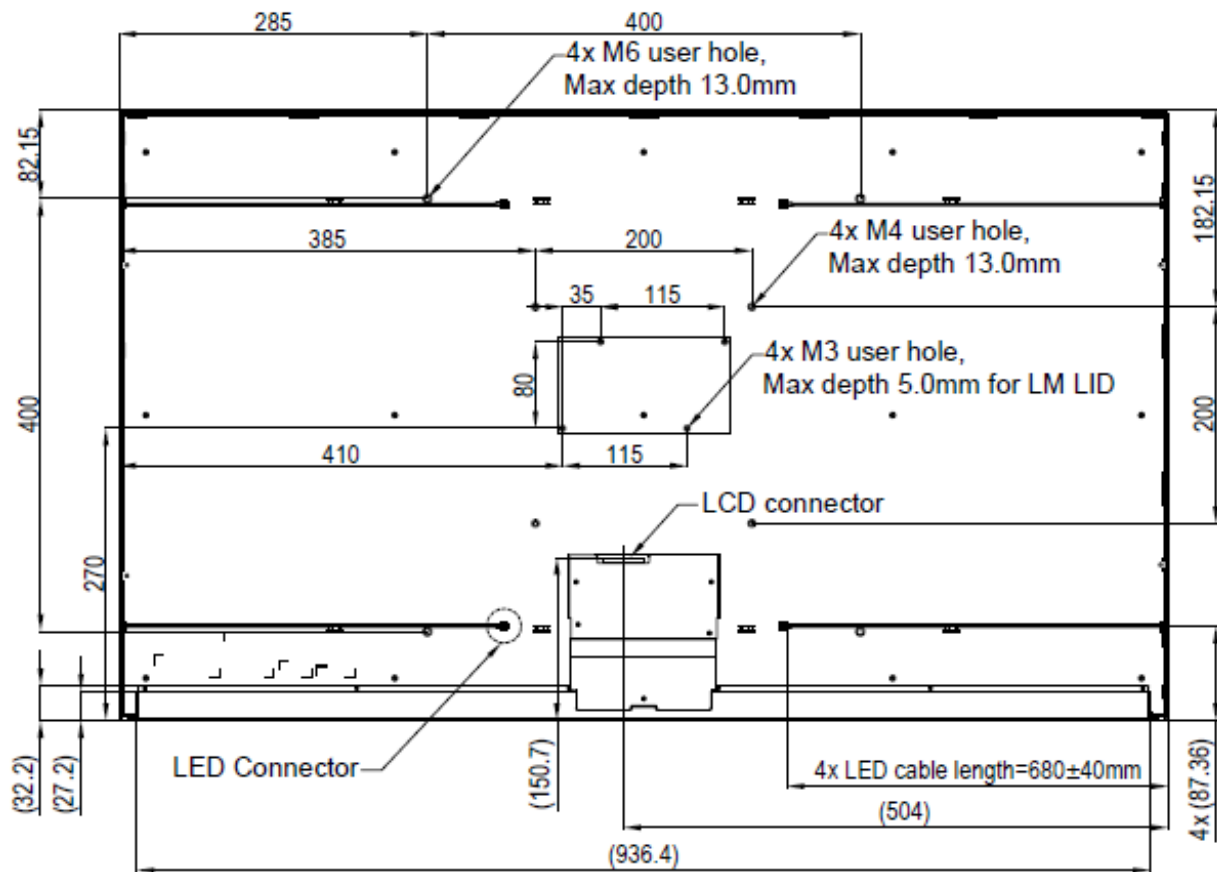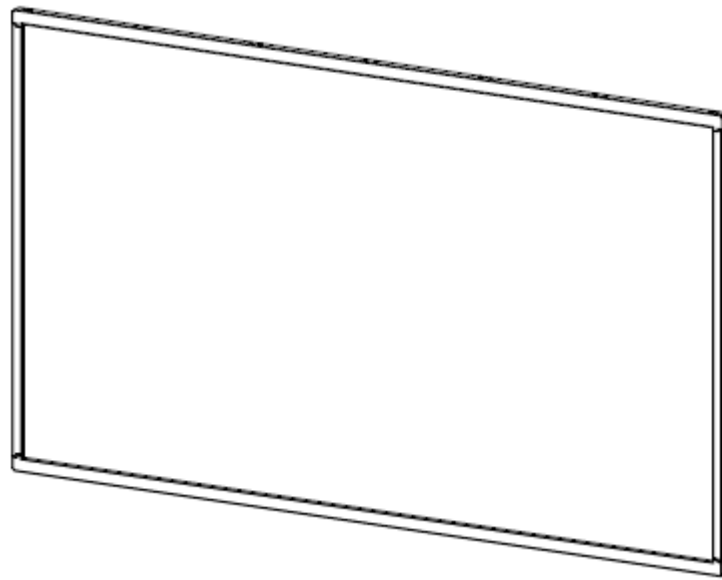

- Note:
- 1.LCD connector: JAE FI-RTE51SZ-HF
 - 2.Tolerance is ± 1.0 mm unless noted
 3. "()" marks the reference dimension