

DLF4309-ANU / DLH4309-ANU V2



43" TFT LCD, LED Backlight 1800nits, UHD(3840x2160)

The DLF/DLH4309-ANU is a 43 inch industrial grade sunlight readable LCD with a high brightness of 1800 nits. It produces sharp images, crisp text, and lifelike colors. The Durapixel LED backlight technology ensures high reliability and low power consumption, suitable for outdoor, kiosk, factory automation, military, transportation, gaming applications, and so much more.



KEY FEATURES

- High Brightness 1800 nits
- Sunlight Readable
- LED Backlight
- Low Power Consumption
- Slim Bezel
- BL MTBF: 100,000 hours


SPECIFICATIONS


Model No.	DLF4309-ANU / DLH4309-ANU V2
Description	43" TFT LCD, LED Backlight 1800 nits, UHD (3840x2160)
Display Area (mm)	941.184(H) x 529.416(V)
Brightness	1800 cd/m ²
Resolution	3840x2160
Aspect Ratio	16 : 9
Contrast Ratio	4500 : 1
Pixel Pitch (mm)	0.49005(H) x 0.49005(V)
Pixel Per Inch (PPI)	102
Viewing Angle	178°(H),178°(V)
Color Saturation (NTSC)	82%
Display Colors	1.07G
Response Time (Typical)	8ms
Panel Interface	V-by-One
AD Board Input Interface	VGA, DVI-D, HDMI, DP
AD Board Input Power	DC12V (DC24V optional)
Power Consumption	193W, (198W with AD Board)
OSD Key	5 Keys (Power Switch, Menu, +, Exit, -)
OSD Control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Dimensions (mm)	968.2 x 556.4 x 48.8
Bezel Size(U/B/L/R)	11.5/11.5/11.6/11.6 mm
Weight (Net)	11kg
Operating Temperature	0 °C ~ 50 °C
Storage Temperature	-20 °C ~ 60 °C

*Specifications are subject to change without notice. **All brands or product names are trademarks or registered trademarks of their respective companies.

DLF= Panel + LED Driving Board

DLH= Panel + LED Driving Board + AD Control Board

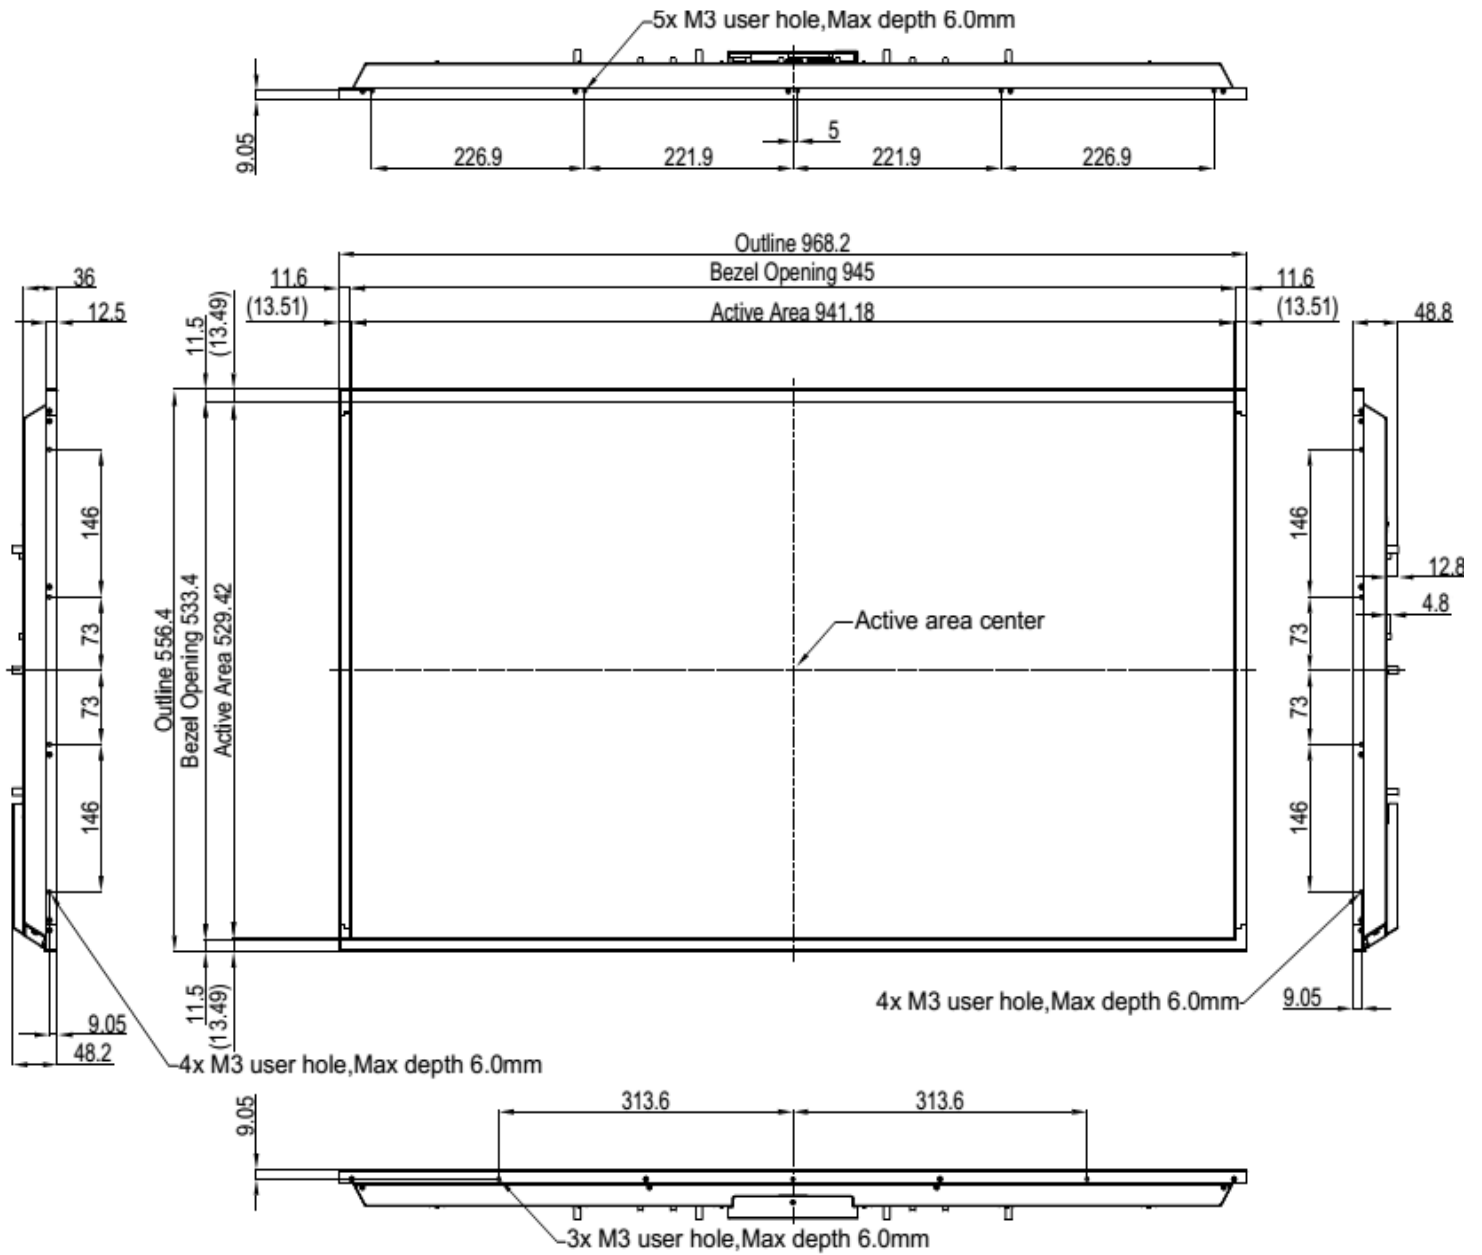

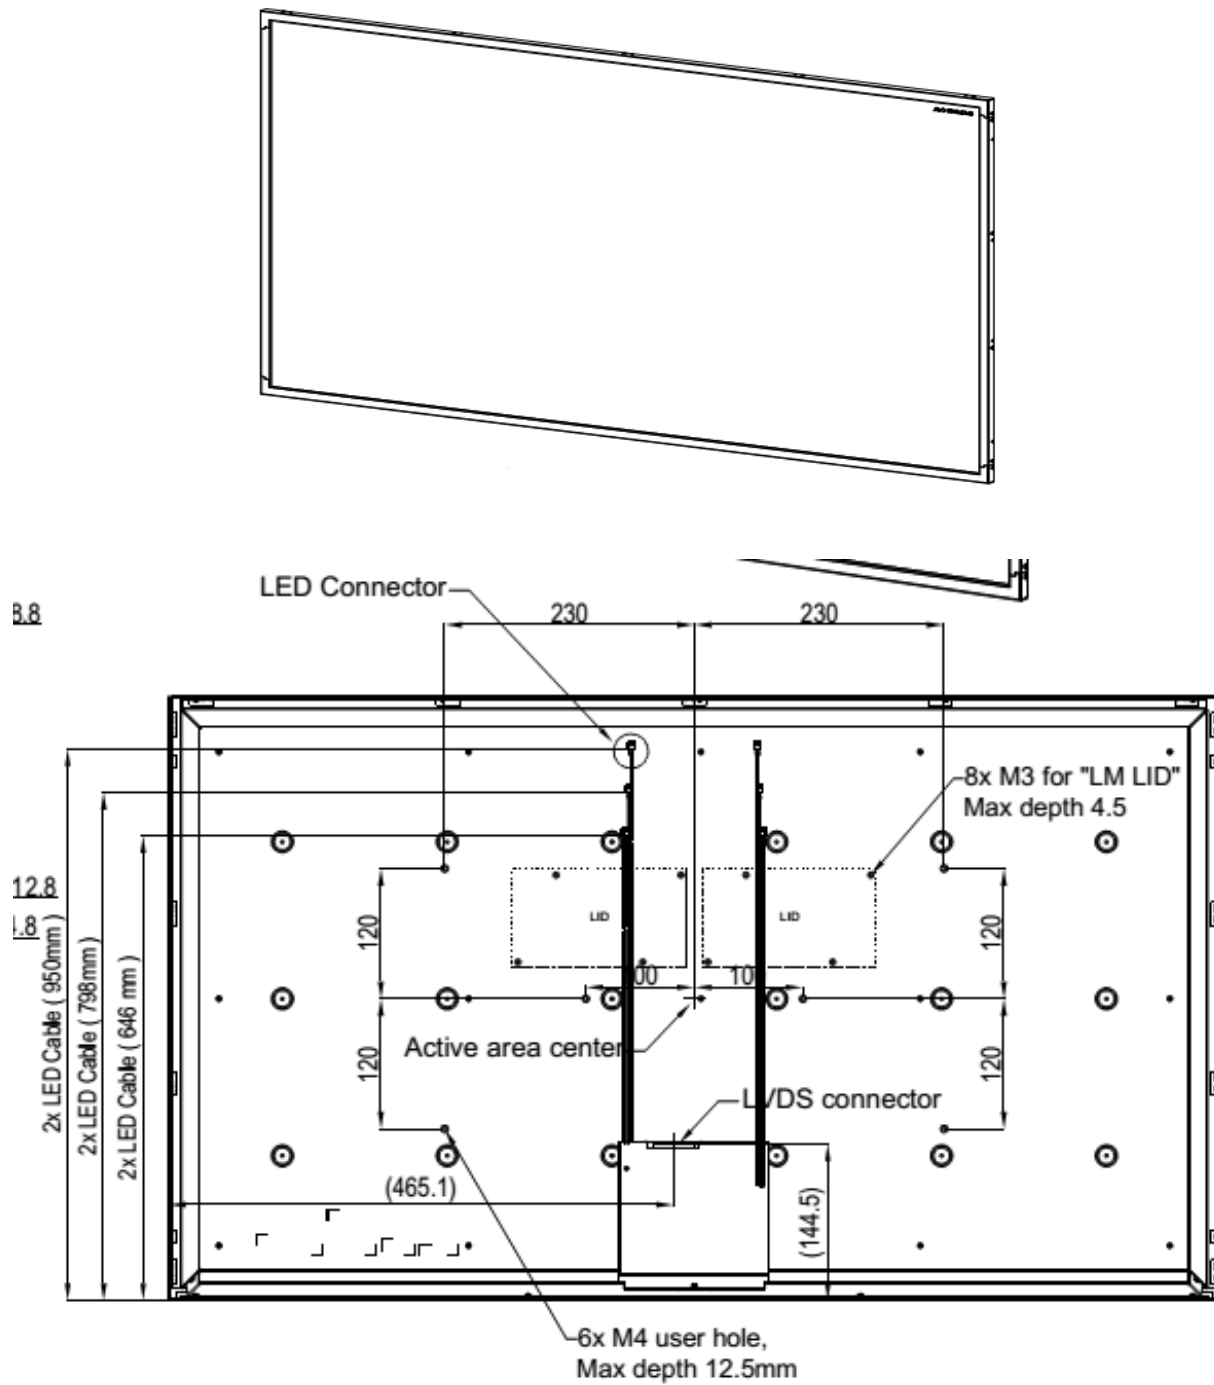

Note:
 1.LCD connector: JAE FI-RTE51SZ-HF
 2.Tolerance is ± 1.0 mm unless noted

